

CA2 ON
EVR.75

....

A52

AMBIENT AIR QUALITY IN THE SARNIA AREA

ANNUAL REPORT 1982



Ontario

Ministry
of the
Environment


Copyright Provisions and Restrictions on Copying:

This Ontario Ministry of the Environment work is protected by Crown copyright (unless otherwise indicated), which is held by the Queen's Printer for Ontario. It may be reproduced for non-commercial purposes if credit is given and Crown copyright is acknowledged.

It may not be reproduced, in all or in part, for any commercial purpose except under a licence from the Queen's Printer for Ontario.

For information on reproducing Government of Ontario works, please contact ServiceOntario Publications at copyright@ontario.ca

limited distribution
** free
Sarnia district office
242 H India Rd. S. Suite 205
Sarnia, Ont. N7T 3W4
CA20N
EVR.75
A52

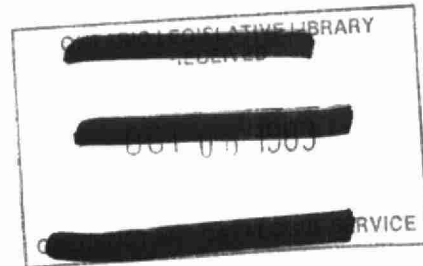

AMBIENT AIR QUALITY
IN THE
SARNIA AREA

ANNUAL REPORT 1982

Technical Support Section
Southwestern Region
ONTARIO MINISTRY OF THE ENVIRONMENT

August, 1983

ONTARIO LEGISLATIVE LIBRARY
TORONTO

NOV 04 1990

RECEIVED

TABLE OF CONTENTS

	Page
SUMMARY	1
INTRODUCTION	2
DESCRIPTION OF MONITORING NETWORK	3
METEOROLOGICAL DATA	5
MONITORING AND PROGRAM RESULTS	6
PARTICULATES	6
Suspended Particulates	6
Chemical Analysis of Suspended Particulates	11
Dustfall	11
SULPHUR OXIDES	12
Sulphur Dioxide	12
AIR POLLUTION INDEX	17
HYDROGEN SULPHIDE AND MERCAPTANS	21
CARBON MONOXIDE	22
OXIDES OF NITROGEN	24

TABLE OF CONTENTS - continued

	Page
HYDROCARBONS	25
OXIDANTS	26
FLUORIDES	28
APPENDIX 1. MONITORING NETWORK	32
APPENDIX 2. METEOROLOGICAL DATA	37
APPENDIX 3. PARTICULATES	39
APPENDIX 4. HYDROGEN SULPHIDE AND MERCAPTANS, CARBON MONOXIDE, OXIDES OF NITROGEN, HYDROCARBONS AND OZONE	43

SUMMARY

Ambient air quality monitoring in the Sarnia area revealed that the general trend towards lower levels of air pollutants continued in 1982. Specifically improvement was noted in the levels of suspended particulates, sulphur dioxide, the Air Pollution Index, hydrogen sulphide and mercaptans and fluorides. Levels of carbon monoxide were low, as they have been for several years. Levels of oxides of nitrogen were comparable to previous years with the exception that there was one nitrogen dioxide concentration recorded above the 1-hour criterion for desirable ambient air quality. No such excursions had been recorded in previous years.

The improvement in levels of sulphur dioxide is attributed in part to the Lambton Industrial Meteorological Alert system. This system requires industries that are appreciable sources of sulphur dioxide emissions to provide added controls when ambient levels of sulphur dioxide reach an alert level and meteorological conditions conducive to elevated levels of sulphur dioxide are forecasted.

Although the frequency of excursions of ozone levels above the criterion for desirable ambient air quality was lower in 1982 than 1981 there has been no long-term trend of decreasing levels of ozone. Ozone is a pollutant formed by photochemical reactions of other pollutants. The photochemical reactions are very dependent on meteorological conditions and as meteorological conditions vary from year-to-year so do the ambient levels of ozone. Ozone may be transported hundreds of kilometres or its precursor pollutants may be transported similar distances prior to reacting to form ozone. Conversely, with the proper meteorological conditions, the precursor pollutants may

react to produce ozone close to their points of origin. Thus, adequate control of ozone will be dependent on the development of control strategies at both local and international levels. The U.S. Environmental Protection Agency is requiring states to implement control strategies that will ensure attainment of the U.S. primary air quality standard for ozone by December 31, 1987. Ontario is endeavoring to ascertain the most effective means of controlling ozone. In this regard, several contracts have been let to consultants and special air quality studies are planned.

INTRODUCTION

The ambient air monitoring network of the Ministry of the Environment measures the levels of a number of pollutants that may directly or indirectly adversely affect health, vegetation or the enjoyment of property. Data on levels of pollutants are compared with Ontario's criteria for desirable ambient air quality. Thus, excursions above these criteria reflect undesirable conditions. Data are also used to determine trends in air quality and therefore, the effectiveness of pollution abatement, as well as to provide information on the effect of specific sources of pollutants and to formulate strategies to control pollution.

Ontario Hydro, the Lambton Industrial Society and private industry also operate ambient air monitors in the Sarnia area. The Ministry conducts phytotoxicology surveys to determine the effects of air pollutants on vegetation.


Emissions from industrial and other sources of pollutants located in Ontario are regulated by this Ministry through a Certificate of Approval. There is an integrated co-operative air pollution control program for the Michigan-Ontario international area between Lake Huron and Lake Erie. Ambient air quality data and reports on emissions and compliance with abatement schedules are exchanged and are reported to the International Joint Commission.

DESCRIPTION OF MONITORING NETWORK

Continuous and intermittent monitors for determining levels of pollutants in ambient air are maintained by the Ministry at sites dispersed throughout the Sarnia area. However, monitoring is more intensive in the area of downtown Sarnia because it has a higher potential for elevated levels of pollutants than most other areas in the city. This higher potential is a result of the downtown area being affected by emissions from industries and power plants to the south, as well as by dense vehicular traffic and commercial establishments in the downtown area. The industries and power plants to the south of the downtown area tend to be located along the St. Clair River and plumes from different emission sources can create an additive impact when they impinge on the downtown area. Furthermore, the taller buildings situated in the downtown core affect wind currents and may bring pollutants from aloft down towards ground level.

The locations of the Ministry's fixed monitoring sites are illustrated in Figure 1. Also included in Figure 1 are the locations of monitoring sites of Ontario Hydro and the Lambton Industrial Society. Specific locations and the pollutants monitored are listed in Table A1, Appendix 1.

Criteria for desirable ambient air quality and the supporting rationale for the establishment of these criteria appear in Table A2, Appendix 1.

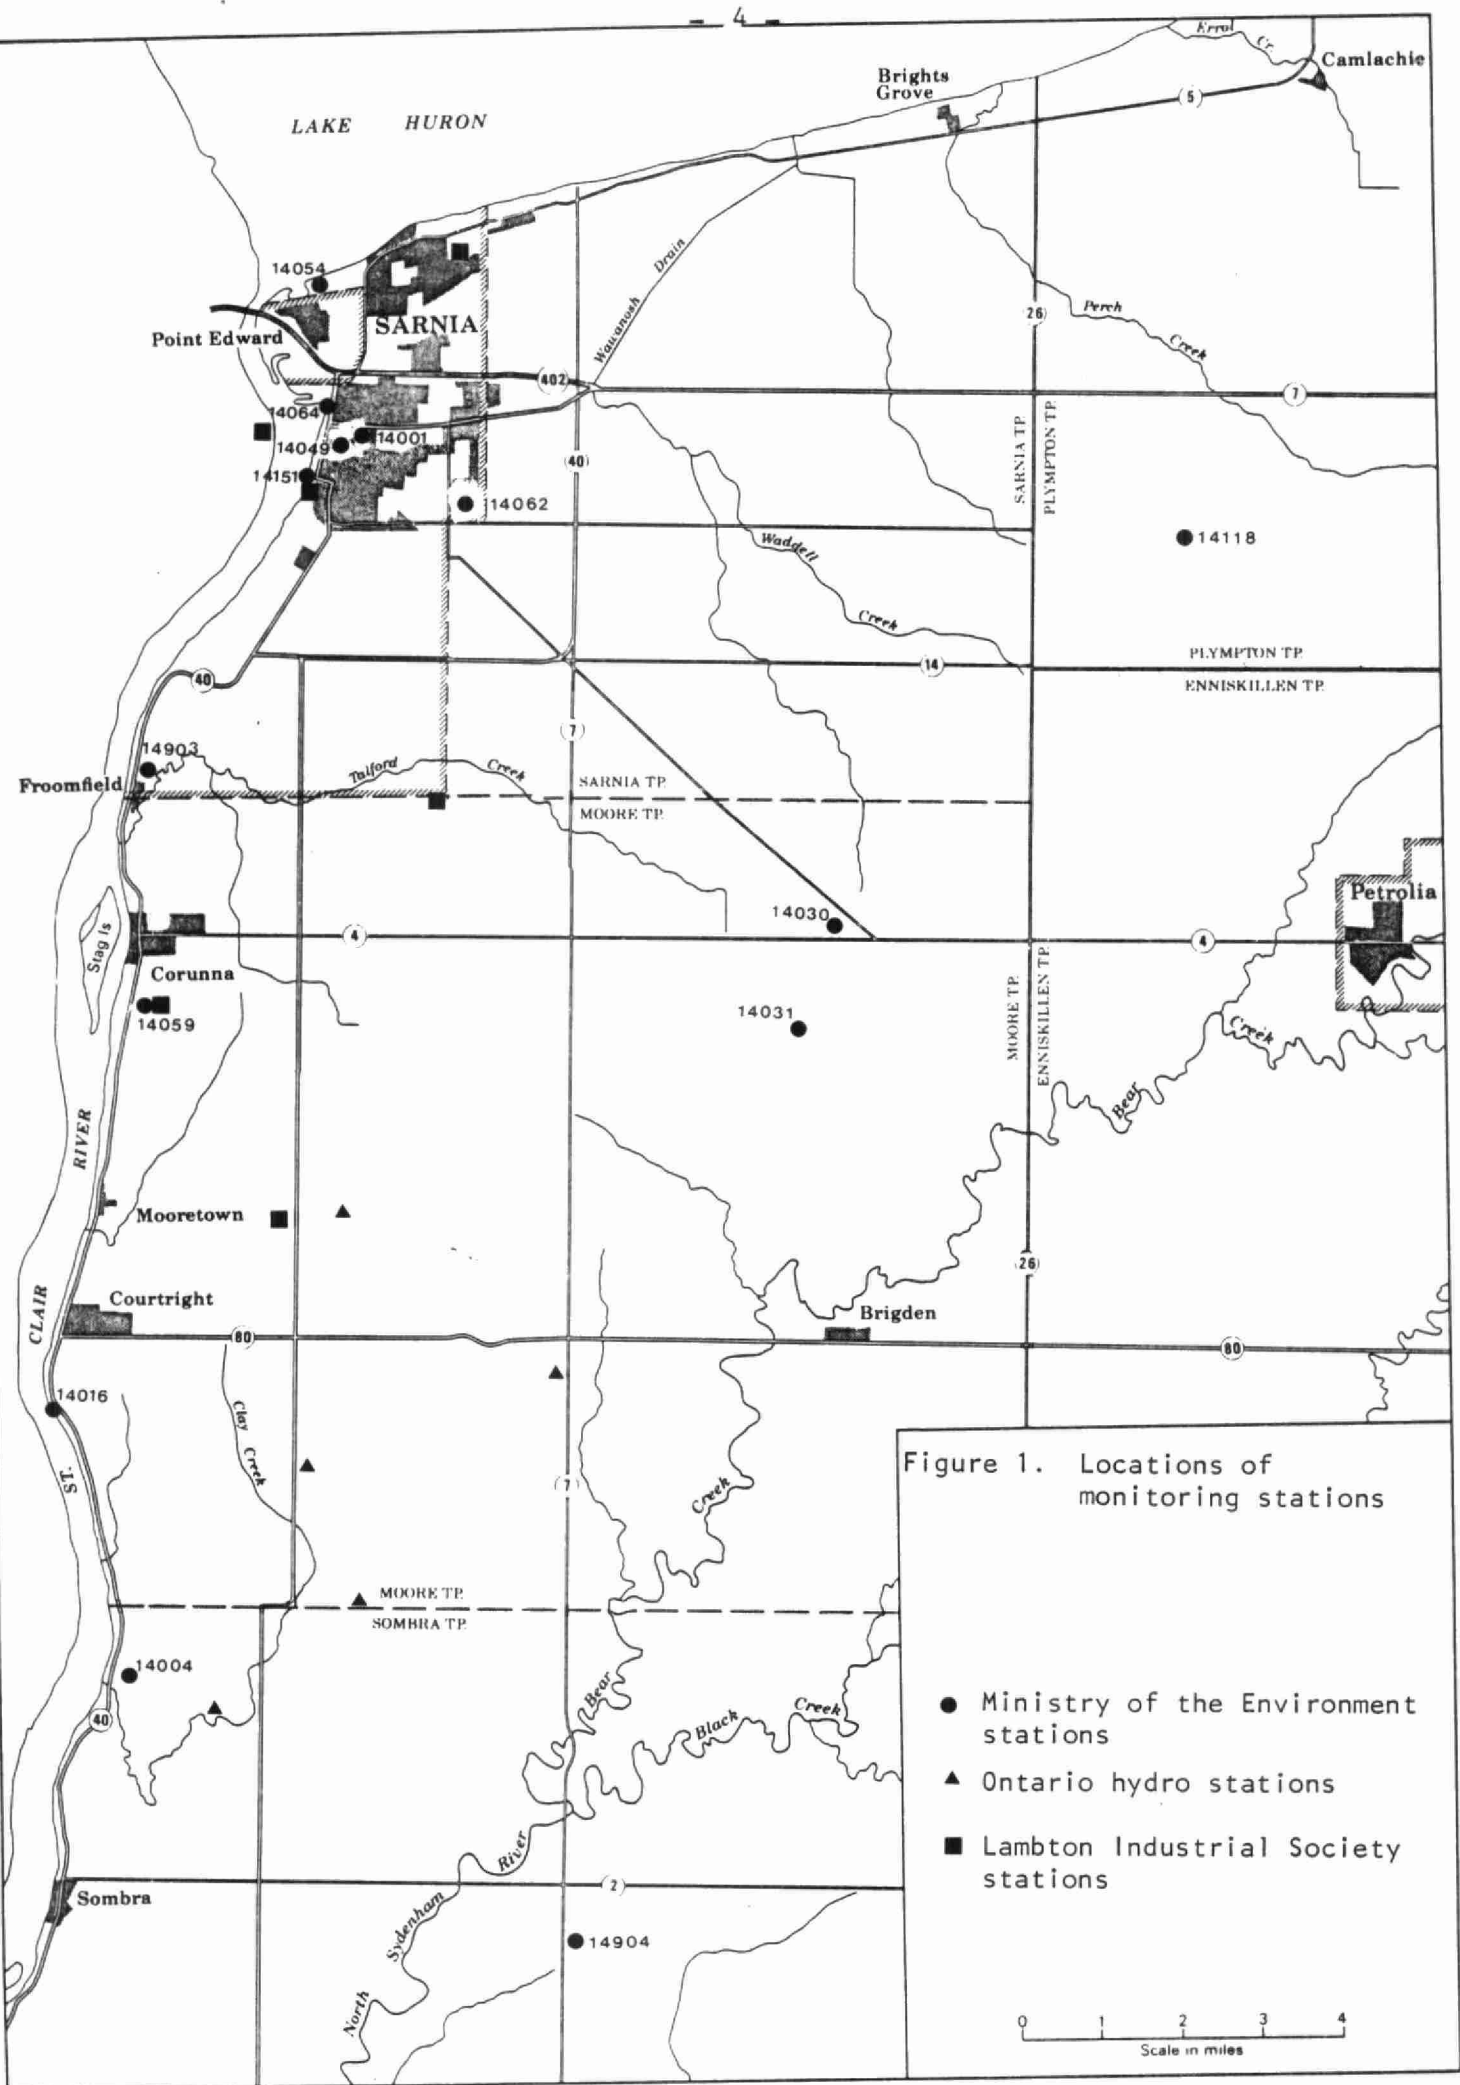

METEOROLOGICAL DATA

Meteorological data are utilized in predicting the stability of the atmosphere which affects the dispersion of pollutants. These data also assist in identifying sources of elevated levels of pollutants and in validating mathematical models designed to simulate the dispersion of air pollutants.

The main meteorological tower in the area is located at station 14016 immediately south of Courtright. Wind speed and direction are measured at 10 metres, 30 metres and 92 metres above ground level. In addition, ambient temperature is measured at the 10-metre level and the gradients in temperature between the 10-metre level and the 30- and 92-metre levels are determined. These meteorological data are transmitted by a telemetry system to Toronto where meteorologists utilize them to forecast the stability of the atmosphere. This forecasting feature is an intrinsic part of the Air Pollution Index and the Lambton Industrial Meteorological Alert, both discussed later in this report. Wind speed and wind direction are also measured at the 10-metre level at station 14062, located in east Sarnia.

Meteorological data from station 14016 and 14062 have been used to compute the average concentrations of some pollutants for specific wind directions and to determine the number of hours that the criteria for ozone have been exceeded for different wind directions.

A summary of the frequency of winds for different directions at the 30-metre level of station 14016 appears in Table A3, Appendix 2. The data indicate that the prevailing winds are from the south and southwest.

MONITORING PROGRAM AND RESULTS

PARTICULATES

Primary sources of man-caused emissions of particulates to the atmosphere are vehicular traffic, materials handling and combustion processes. Wind-blown particulates from open fields, sand and coal piles, roadways and roofs are also significant sources.

Measurements for particulates are reported as total suspended particulates, dustfall and soiling index. Total suspended particulates are determined by drawing measured volumes of air through a pre-weighed filter for 24 hours and subsequently weighing the quantity of particulates collected on the filter. Dustfall is determined through the exposure of open cylinders (jars) of known diameter for approximately 30 days and subsequently weighing the amount of particulates collected. Soiling index is measured by determining the difference in the amount of light that is transmitted through a filter before and after ambient air is drawn through the filter for 1 hour. The amount of light transmitted through the filter is affected by the quantity, size, shape and opaqueness of particulates retained on the filter. Soiling index can be correlated to levels of suspended particulates and can be determined without the time-consuming laboratory analysis required for determining concentrations of total suspended particulates. For these reasons, soiling index is used as a substitute for suspended particulate values when data are required quickly such as in the Air Pollution Index.

Total Suspended Particulates

Two criteria for desirable ambient air quality exist for total suspended particulate matter. One is 120 micrograms of suspended particulates per cubic metre of air

(ug/m³) averaged over a 24-hour period. The other is an annual geometric mean of 60 ug/m³. The criterion for 24 hours is based on impairment of visibility and adverse health effects associated with combined concentrations of sulphur dioxide and suspended particulates. The annual criterion is based on public awareness of suspended particulates and property damage.

During 1982 total suspended particulates were sampled at 9 sites in the Sarnia area. At 8 of the sites sampling was conducted on an every-sixth-day schedule for the year while at the remaining site, station 14016, sampling was conducted on a daily basis. The national monitoring networks of the United States and Canada operate on the same every-sixth-day sampling schedule for suspended particulate matter. The Ministry operates the daily schedule at station 14016 to evaluate how representative the every-sixth-day schedule is of the complete year. The 1982 data indicates that the every-sixth-day schedule was representative of conditions throughout 1982.

Levels of total suspended particulates in 1982 were very similar to 1981 levels and appreciably lower than other previous years. This was true for most of southwestern Ontario and eastern Michigan. In the Sarnia area, the annual criterion was not exceeded during 1982 - the first year that all area stations have met the criterion since monitoring began in 1962. The 24-hour criterion was exceeded infrequently at 7 of the 9 sites and not at all at the remaining 2 sites. The total number of excursions recorded above the 24-hour criterion in the Sarnia area for 1982 was 20 and the total number of valid samples reported was 795. Of these 20 excursions, 7 occurred on one day, May 5, a day that had adverse meteorology conducive to elevated levels of suspended particulate matter across southwestern

Ontario. A summary of 1982 data for total suspended particulate matter appears in Table 1. Figure 2 shows the annual geometric means and the frequencies of excursions above the 24-hour criterion for 1982 at the approximate locations of monitoring sites.

Table 1. Summary of 1982 data for total suspended particulates.

Station No.	No. of samples collected	Annual geometric mean ($\mu\text{g}/\text{m}^3$)	No. of values greater than 24-hour criterion	Percentage of values greater than 24-hour criterion
14001	58	46	0	0
14016	339	36	6	2
14016-S	58	38	2	3
14030	58	36	2	3
14031	58	37	2	3
14054	57	50	2	4
14059	58	39	0	0
14062	57	46	2	4
14064	56	58	4	7
14151	54	51	2	4

Note: Data for station 14016-S are every-sixth-day sampling results extracted from the daily sampling data for station 14016.

The improvement in levels of total suspended particulate matter in 1981 and 1982 compared to previous years is illustrated by Figure 3. This figure indicates that for 5 monitoring sites ⁽¹⁾ in operation since 1972 the average annual geometric means decreased steadily from 1972 to 1975, remained relatively constant from 1975 to 1980 and then dropped appreciably to the 1981 and 1982 levels. Similarly, the average frequency of excursions above the 24-hour criterion was lowest in 1982.

- (1) The 5 stations are 14001, 14016, 14054, 14151 and 14064. Station 14064 replaced station 14049 in 1978 but comparison studies revealed that the levels of suspended particulates were similar.



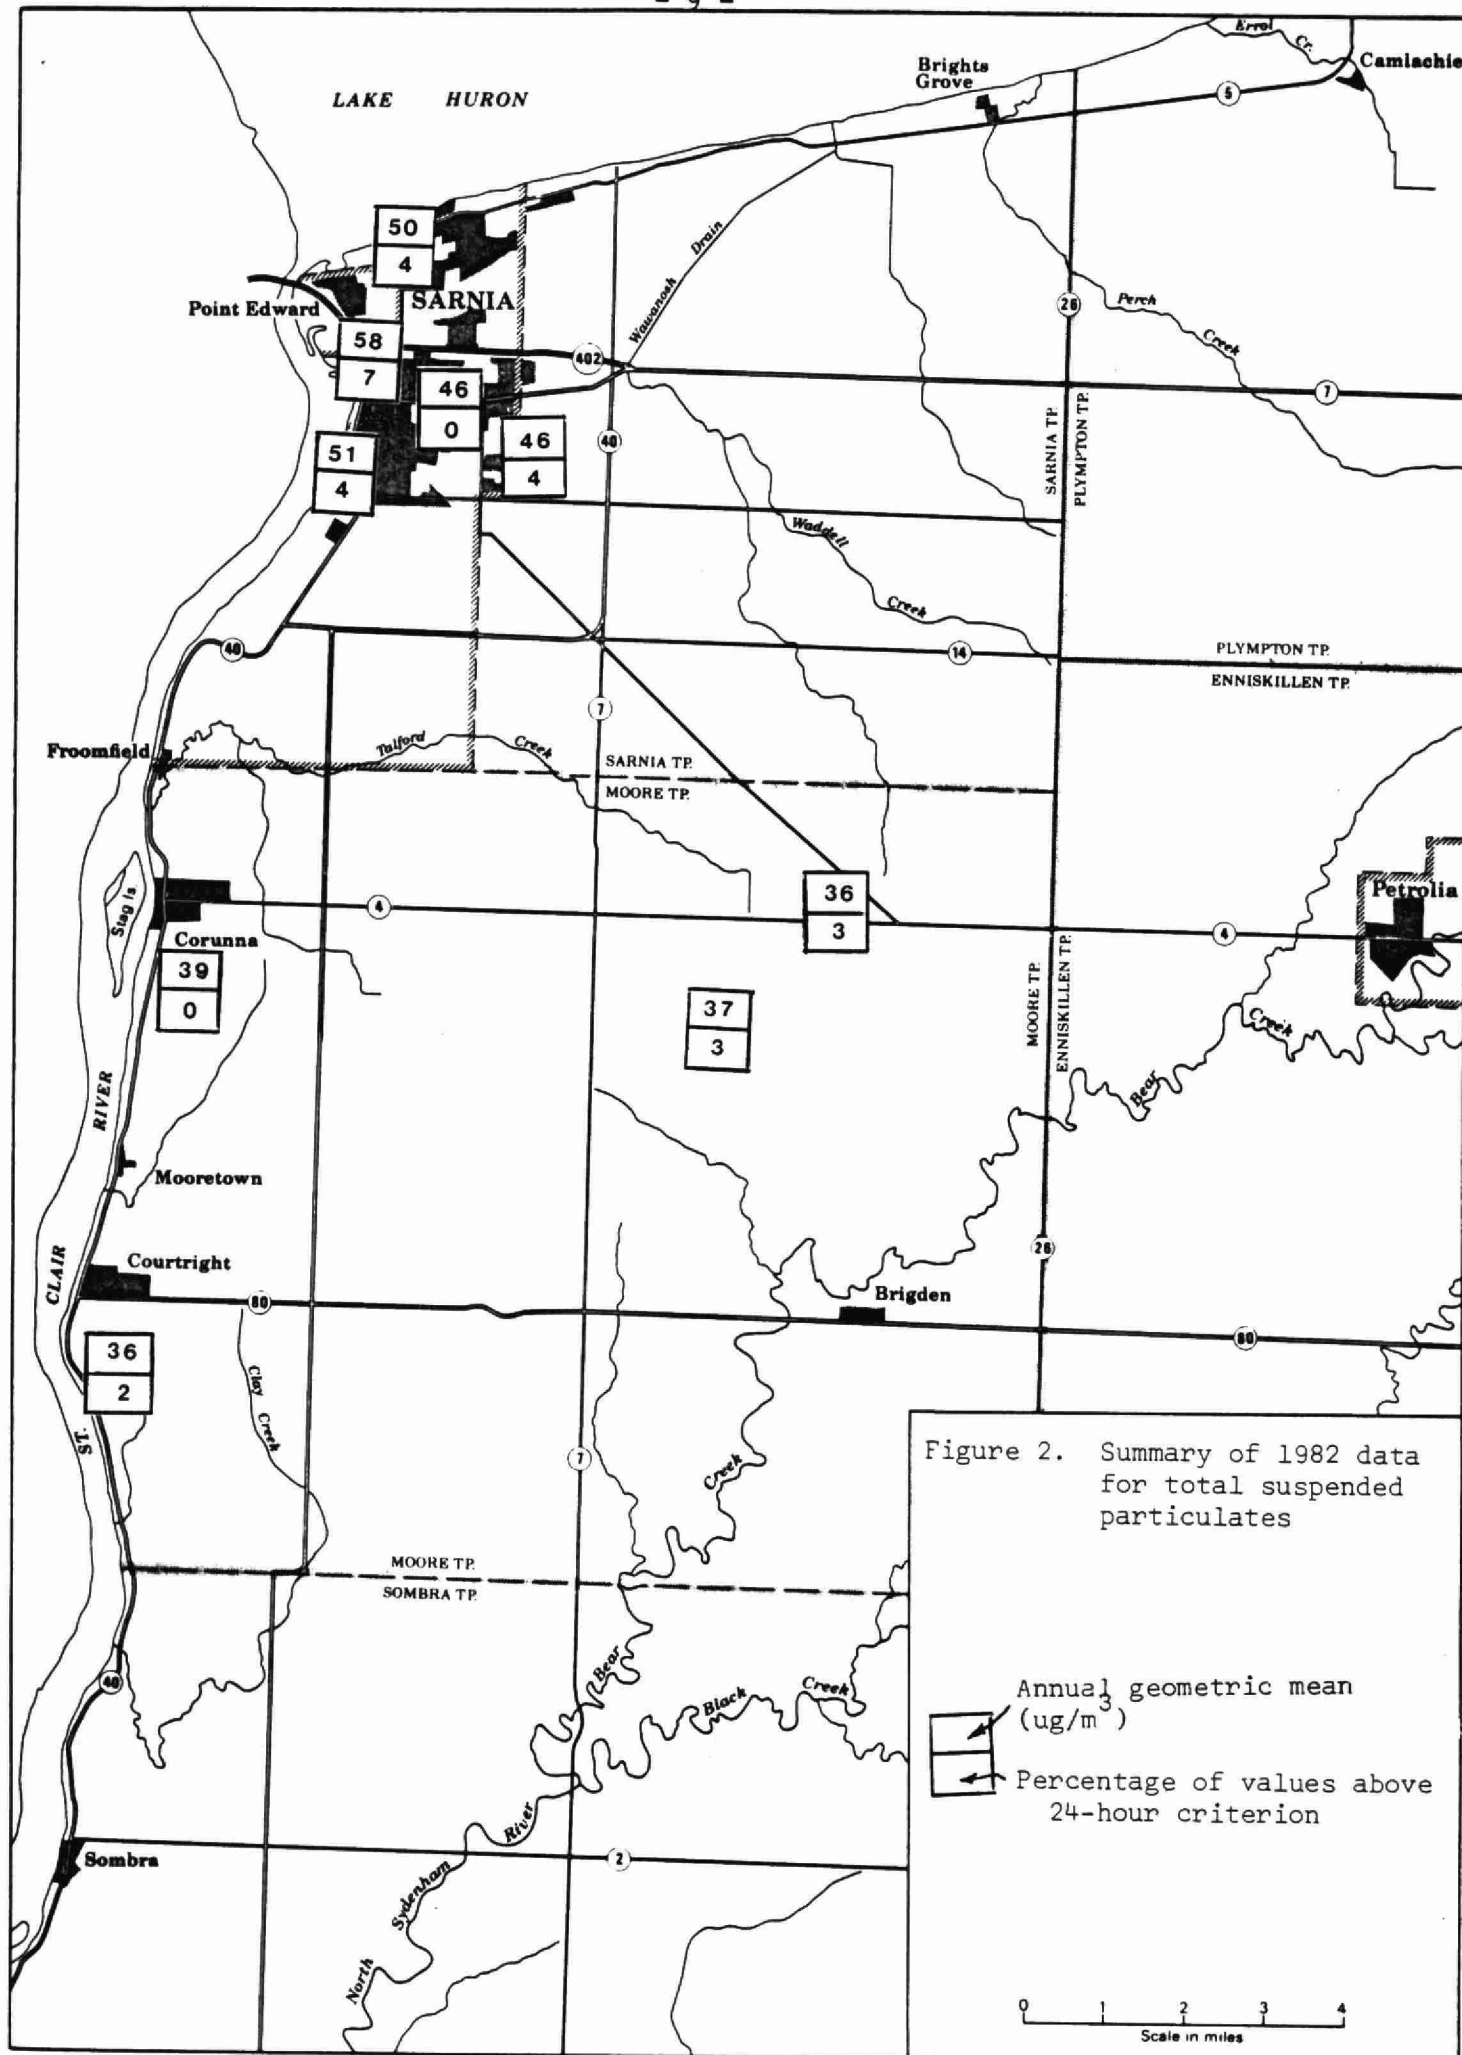


Figure 2. Summary of 1982 data for total suspended particulates

Figure 3. Trend in levels of total suspended particulates based on data averaged for five monitoring stations.

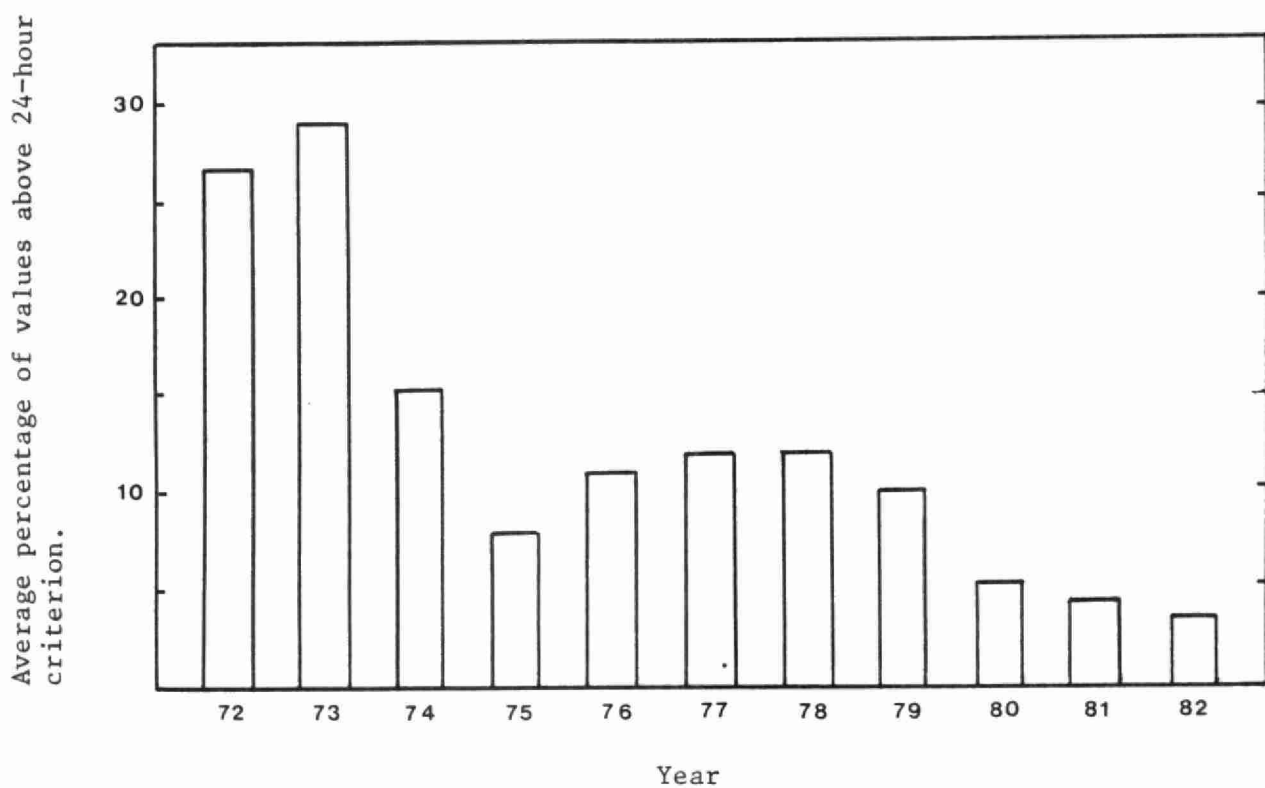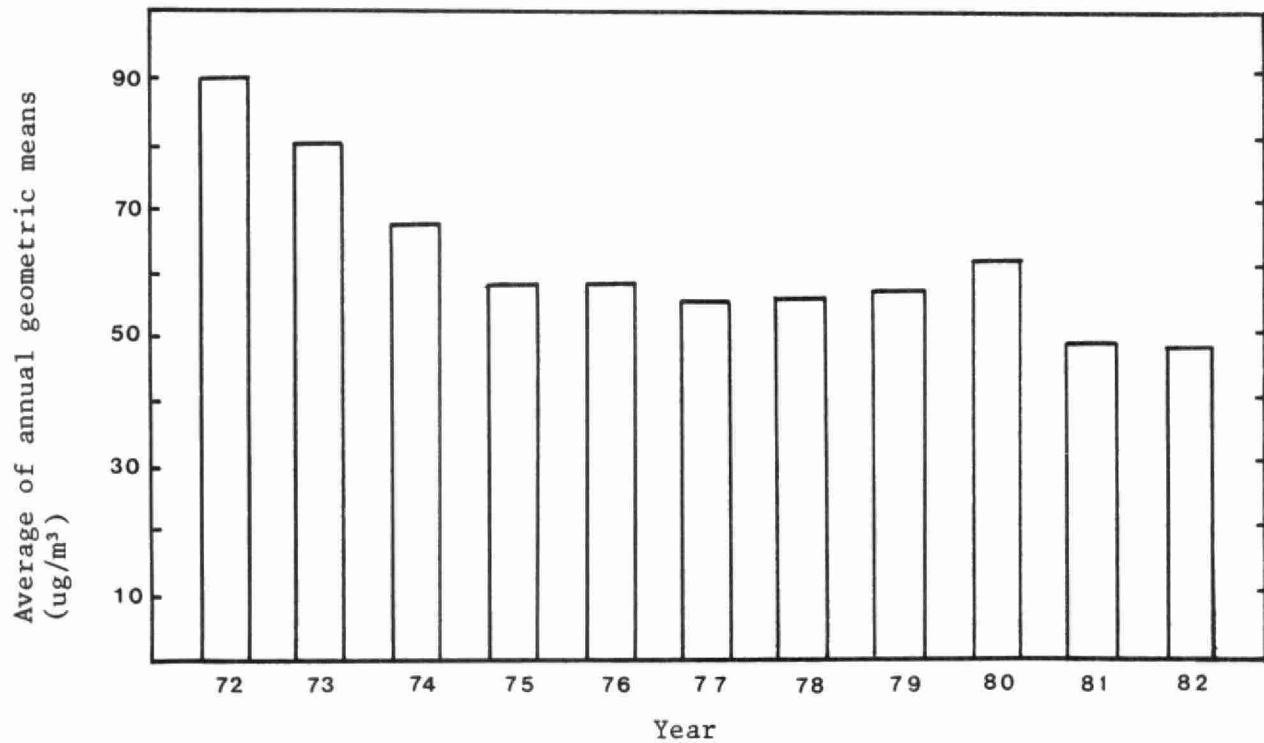

In general, levels of total suspended particulates in the Sarnia area compare favourably with levels measured in other areas of Ontario.

Chemical Analysis of Suspended Particulates

As part of a Province-wide study, samples of suspended particulates collected at 5 stations in the Sarnia area were analyzed for cadmium, chromium, copper, iron, lead, manganese, nickel, vanadium, nitrates and sulphates. For 2 additional stations samples were analyzed for nitrates and sulphates and for 1 of the 2 additional sites lead was analyzed. A summary of the data from 1976 through 1982 for these constituents is contained in Table A4, Appendix 3. Data for sulphates is erroneously high, based on the findings of several studies of the sampling method utilized by the Ministry. The Ministry is currently investigating different filter media which may lead to more accurate results.

Criteria for desirable ambient air quality exist for cadmium, lead, nickel and vanadium. There have been no values above the criteria and in general the concentrations of the various metals have been low.

Dustfall

The Ministry of the Environment's criteria for desirable ambient air quality with respect to dustfall are 7.0 grams of particulates per square metre per 30 days ($\text{g/m}^2/30$ days) in any single month and an annual average of 4.6 $\text{g/m}^2/30$ days. These criteria are based on historical data and criteria established by other enforcement agencies.

During 1982 dustfall was sampled at station 14151, located in the downtown core of Sarnia. There were no measurements above the 30-day or annual criteria. In general, dustfall levels measured in the downtown core of Sarnia compare favourably with levels measured in other communities. Table 2 contains the data for station 14151 from 1972 through 1982.

SULPHUR OXIDES

Combustion of sulphur-containing fuels comprises the predominant source of man-made emissions of sulphur oxides. In the Sarnia area, large quantities of these fuels are consumed by power-generating plants in Michigan and Ontario and by petroleum and petrochemical industries located south of downtown Sarnia.

The Ministry of the Environment monitors sulphur oxides in the Sarnia area using continuous gaseous sulphur dioxide analyzers and by analyzing suspended particulate matter for sulphate.

Sulphur Dioxide

Throughout 1982 the Ministry measured gaseous sulphur dioxide at 4 separate sites in the Sarnia area. There were 12 other sites where monitors providing continuous measurements of sulphur dioxide were operated by Ontario Hydro, the Lambton Industrial Society or private industry. Data from these 12 sites are not included in this report but were used to confirm conclusions drawn from the data generated by the Ministry's instruments.

Table 2. Values for dustfall (g/m²/30 days) in downtown Sarnia

Year	Jan	Feb	March	April	May	June	July	Aug	Sept	Oct	Nov	Dec	Annual Arithmetic Mean
<u>Station 14051 (14151)</u>													
1972				<u>7.4</u>			2.1	6.7	4.9	3.9		3.2	<u>4.7</u>
1973	3.5	2.5	6.3	<u>5.6</u>	6.3	6.3	1.8	2.5	2.8	4.9	5.6	2.8	<u>4.2</u>
1974	3.2	4.9	7.0	7.0	5.6	7.0	4.9	2.8	4.2	4.6	3.2	4.2	<u>4.9</u>
1975	4.6	2.1	4.2	2.1	5.6	5.2	4.2	<u>9.1</u>	3.5	5.6	4.2	2.1	<u>4.4</u>
1976	3.2	4.9	6.7	5.3	4.9	4.6	3.5	<u>3.2</u>	2.8	3.2	2.8	2.8	4.0
1977	0.9	3.9	5.6	5.5	4.9	5.2	4.6	4.0	5.1	3.1	4.4	4.4	4.3
1978	1.5	0.9	<u>19.7</u>	<u>12.7</u>	6.3	5.4	4.8	4.3	<u>7.2</u>	4.7	4.6	3.7	<u>6.3</u>
1979			<u>4.6</u>	<u>6.2</u>			4.3	4.9	2.0	<u>3.0</u>	3.1	3.5	<u>4.0</u>
1980	2.2	1.9	3.8	4.0	3.5	5.3	2.0	3.5	5.7	3.8	2.1	2.2	3.3
1981	1.0	2.9	2.1	5.5	4.5	4.5	3.7		5.7	4.4	2.6	1.6	3.5
1982	2.9	4.1	6.4	6.3	4.8	2.9	4.8	1.9	1.7	3.5	2.8	4.7	3.9

Underlined values exceed either the criterion of 7.0 g/m²/30 days or the annual criterion of an average of 4.6 g/m²/30 days.

Station 14051 was replaced with station 14151 in February 1979.

Data are reported as 1-hour average concentrations, 24-hour average concentrations (midnight to midnight) and annual average concentrations. Criteria for desirable ambient air quality are 0.25 parts of sulphur dioxide per million parts of air (ppm) averaged for a 1-hour period, 0.10 ppm averaged for 24 hours and 0.02 ppm as an annual average. The criteria for the 1-hour and annual averages are based on the protection of vegetation while the 24-hour criterion is based on the protection of human health.

In the past there has been concern about the frequency of excursions above the 24-hour criterion for desirable ambient air quality in the downtown area of Sarnia. This concern resulted in a new regulation called LIMA⁽¹⁾ being implemented in April, 1981. This regulation requires major industrial emitters of sulphur dioxide to provide additional controls either continuously or when required by this Ministry. The Ministry may require industry to provide increased controls when meteorological conditions conducive to adverse air quality are likely to persist and sulphur dioxide levels are elevated at specified monitoring sites. This control strategy has been extremely successful. Since the regulations went into effect the 24-hour criterion has not been exceeded at the Ministry's monitoring stations. During 1982 the 24-hour criterion was marginally exceeded once in the downtown area at the Front Street station of the Lambton Industrial Society. It is believed that the requirement for industry to reduce emissions through the LIMA regulation lessened the magnitude by which the criterion was exceeded.

(1) Lambton Industrial Meteorological Alert





Figure 4 shows the frequency of excursions above the 24-hour criterion at stations 14049 and 14064, located in downtown Sarnia, at station 14062 in east Sarnia and at stations 14004 and 14016 located south of Courtright. It is very evident that excursions have occurred most frequently in downtown Sarnia and that excursions have not occurred at these stations since LIMA was implemented in 1981.

Table 3 contains a summary of the 1982 sulphur dioxide data. The annual criterion was not exceeded during 1982. The 1-hour criterion was exceeded on 1 occasion at station 14004, on 4 occasions at station 14016 and not at the other stations. Three of the 4 excursions at station 14016 occurred on September 8, 1982 during calm conditions. The other excursion at station 14016 and the excursion at station 14004 also occurred during calm conditions. All excursions occurred during the mid-afternoon. It was not possible to identify a specific source for these excursions since the calm conditions did not provide reliable wind direction information. There were no reports of unusual activity at any of the major sources of sulphur dioxide in the area. The 1-hour criterion is based on the protection of vegetation and recent annual phytotoxicology surveys by the Ministry have not revealed any damage attributable to sulphur dioxide. Therefore, these rare excursions of the 1-hour criterion are not believed to be creating an air pollution problem.

Table 3. Summary of 1982 data for sulphur dioxide

Station No.	Annual average (ppm)	Percentage of values above criterion		Maximum 1-hour value (ppm)	Maximum 24-hour (daily) value (ppm)
		1-hour	24-hour		
14004	0.00	0.01	0	0.31	0.04
14016	0.01	0.05	0	0.62	0.07
14062	0.01	0	0	0.23	0.05
14064	0.01	0	0	0.24	0.10

Figure 4. Trend in frequency of excursions above 24-hour criterion for sulphur dioxide, 1972 to 1982.

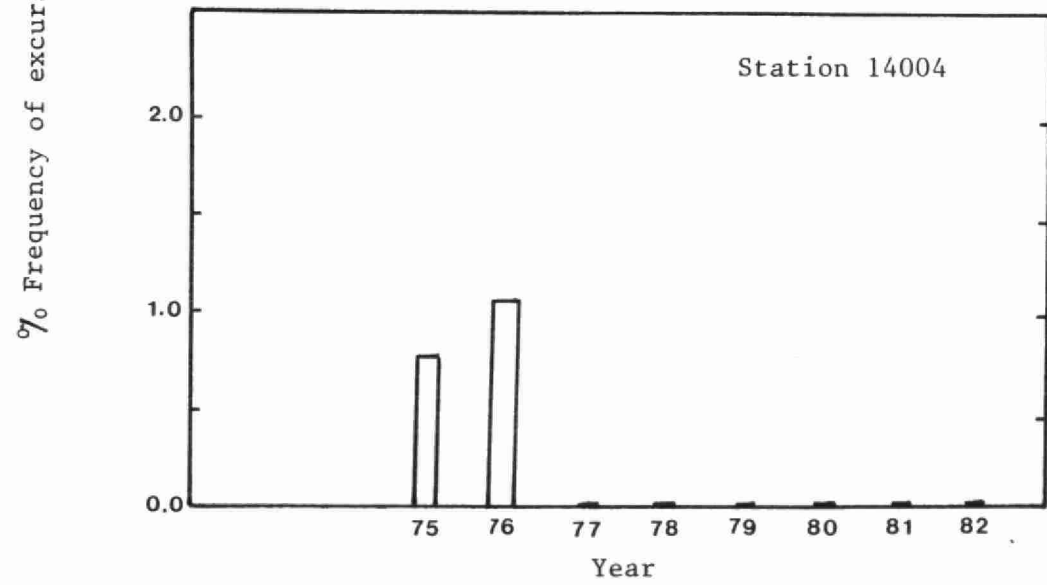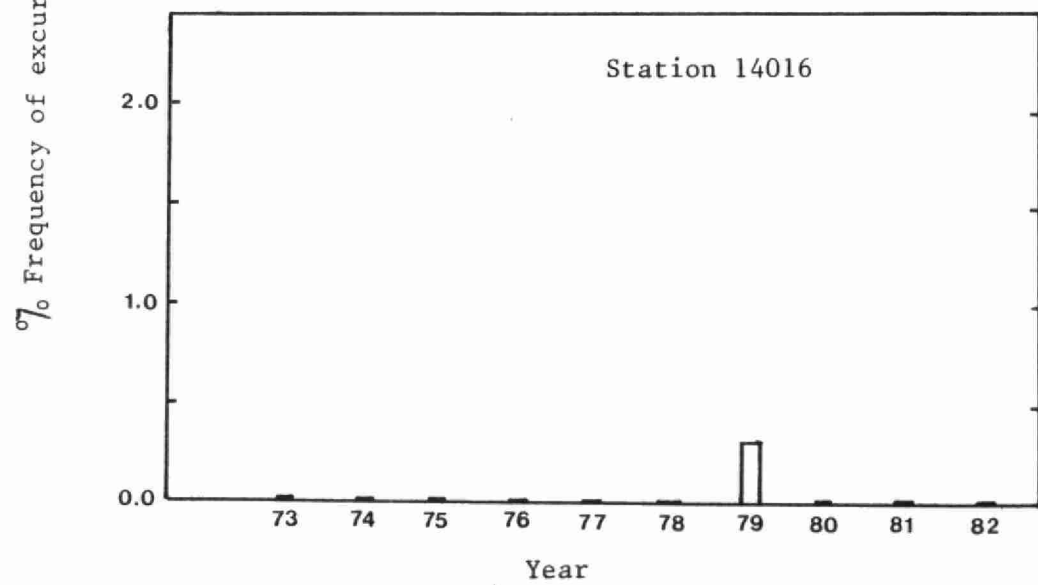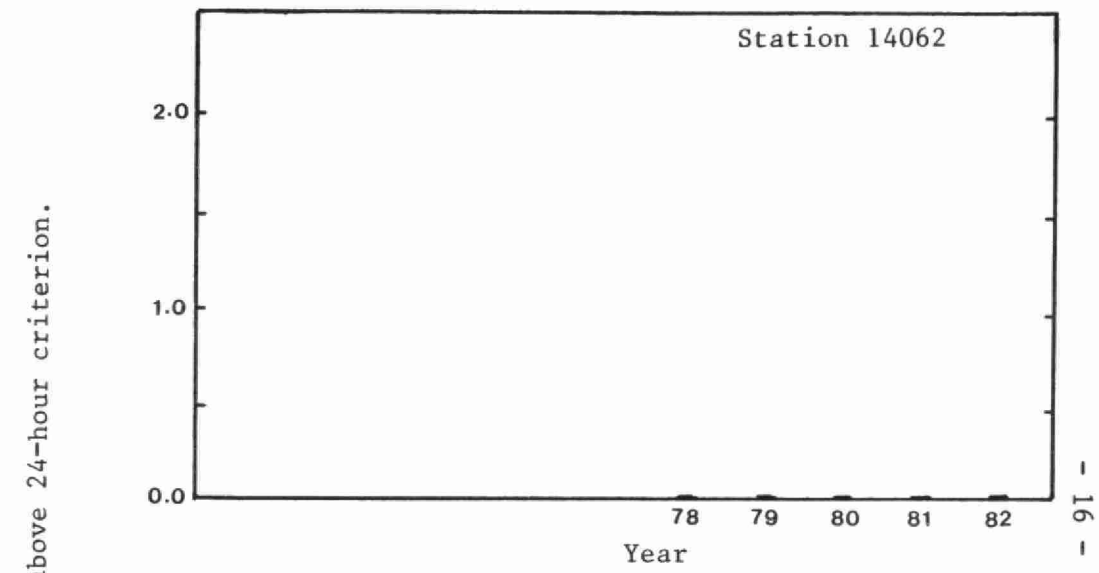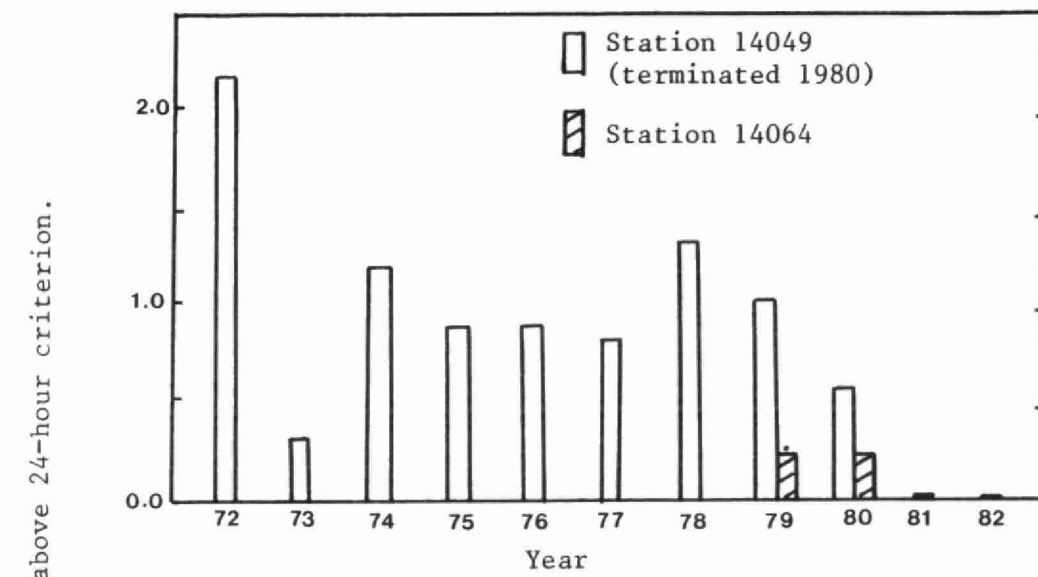


Pollution roses for sulphur dioxide measurements are shown in Figure 5. The roses were created using data for wind direction and speed from the 30-metre level of station 14016 and concentrations of sulphur dioxide determined at the various stations. The length of the line corresponding to a specific wind direction indicates the average sulphur dioxide concentration when the winds are from that direction. The roses for stations 14062 and 14064, located in east Sarnia and downtown Sarnia respectively, reflect appreciably higher levels of sulphur dioxide when winds are blowing from the direction of industries located in south Sarnia and immediately south of Sarnia. However, since the criteria for desirable ambient air quality are met at these monitoring stations, the influence of the local emission sources is not creating a problem.

The roses for the two stations south of Courtright do not reveal an appreciable impact from the nearby power generating stations of Ontario Hydro and Detroit Edison.

AIR POLLUTION INDEX

The Air Pollution Index (API) is a system designed to control or prevent an air pollution episode. Meteorological forecasting and current readings of sulphur dioxide and suspended particulates are utilized to predict the potential for persistence of pollution conditions that are reported as the API.

Data for suspended particulates are provided by the measurements of soiling index and a correlation between concentrations of suspended particulates and soiling index. Hourly values of soiling index and gaseous sulphur dioxide are used to compute 24-hour running averages which are inserted in the following equation:

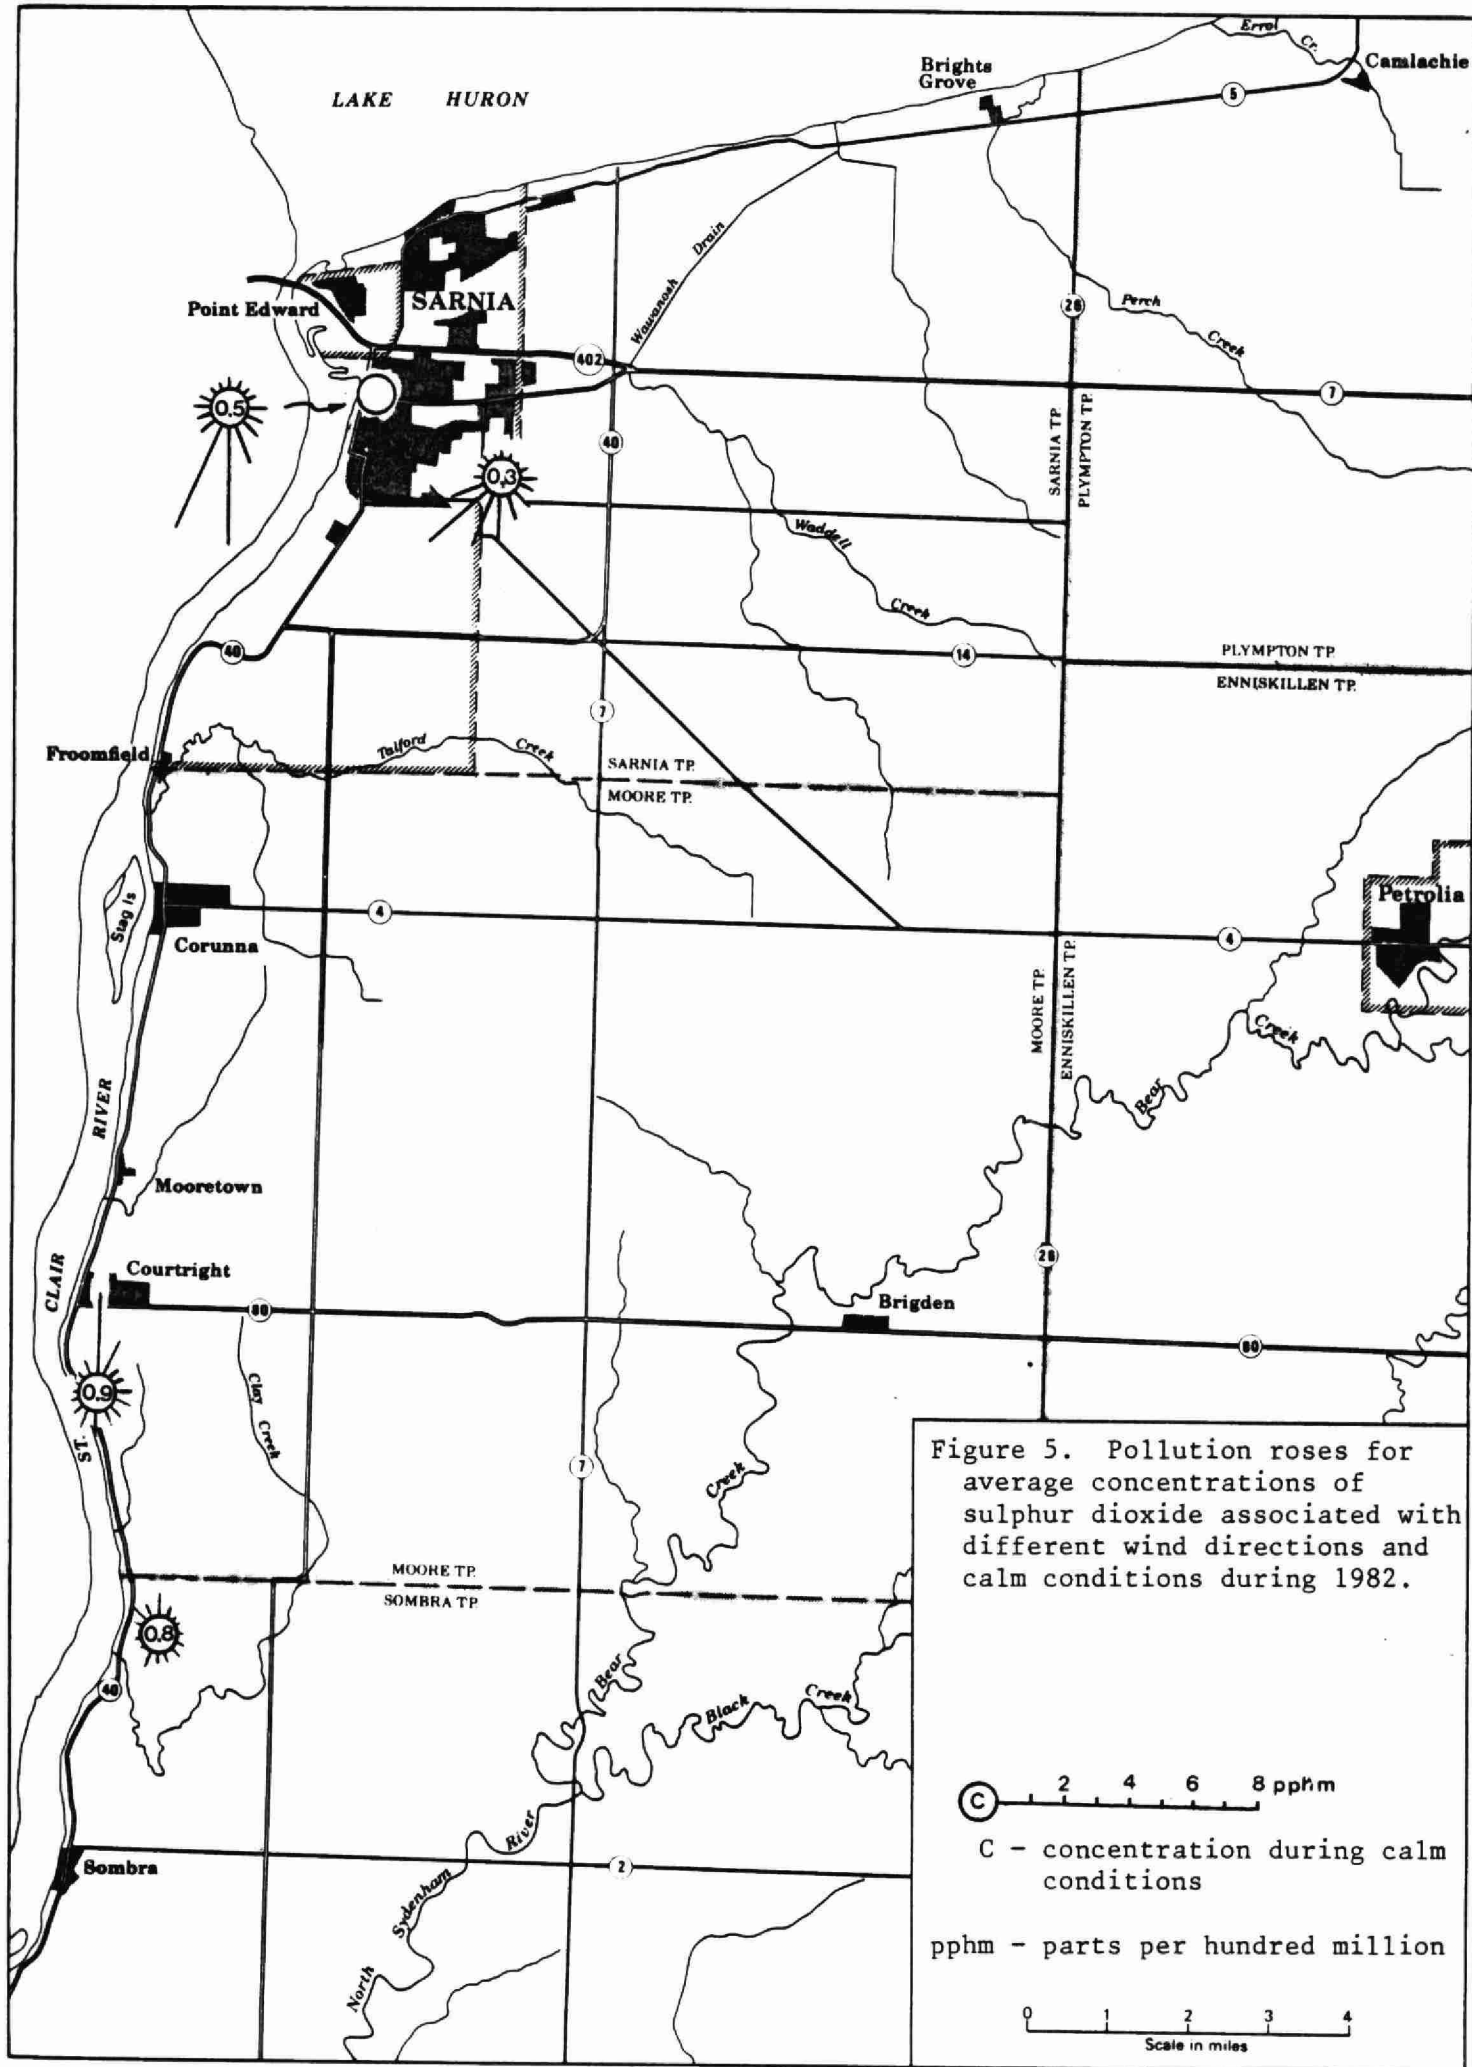

$$\text{API} = 3.02 (9.75 \text{ COH} + 125.95 \text{ SO}_2)^{0.76}$$

where: COH is the 24-hour running average for soiling index expressed in units of coefficient of haze.
SO₂ is the 24-hour running average for sulphur dioxide expressed in parts per million.


The sulphur dioxide and soiling index data utilized to determine the API for Sarnia are obtained from monitors operated at station 14064 in the downtown core.

API values below 32 are considered acceptable. Values from 32 to 49 are at the Advisory Level and if adverse weather conditions are likely to persist, those responsible for major emissions are advised to prepare to curtail operations. At an API of 50, major emitters may be ordered to curtail operations. At 75, further cutbacks can be required. If the API reaches 100 all industries and other contributors of pollution not essential to public health and safety may be ordered to cease operation.

The LIMA regulation to control sulphur dioxide would result in sulphur dioxide emissions being curtailed well before the API reached 50. A very remote possible exception would be if the soiling index were extremely high and levels of sulphur dioxide were low. Since the API was introduced in Sarnia in December 1977 it has not reached 50.

During 1982 the API was always below 32 and therefore acceptable. A favourable comparison between 1982 levels and levels of previous years can be seen in Figure 6. It should be noted that there have been no API levels above 32 since the LIMA regulation came into effect in April, 1981.

Figure 6. Trend in Air Pollution Index levels.

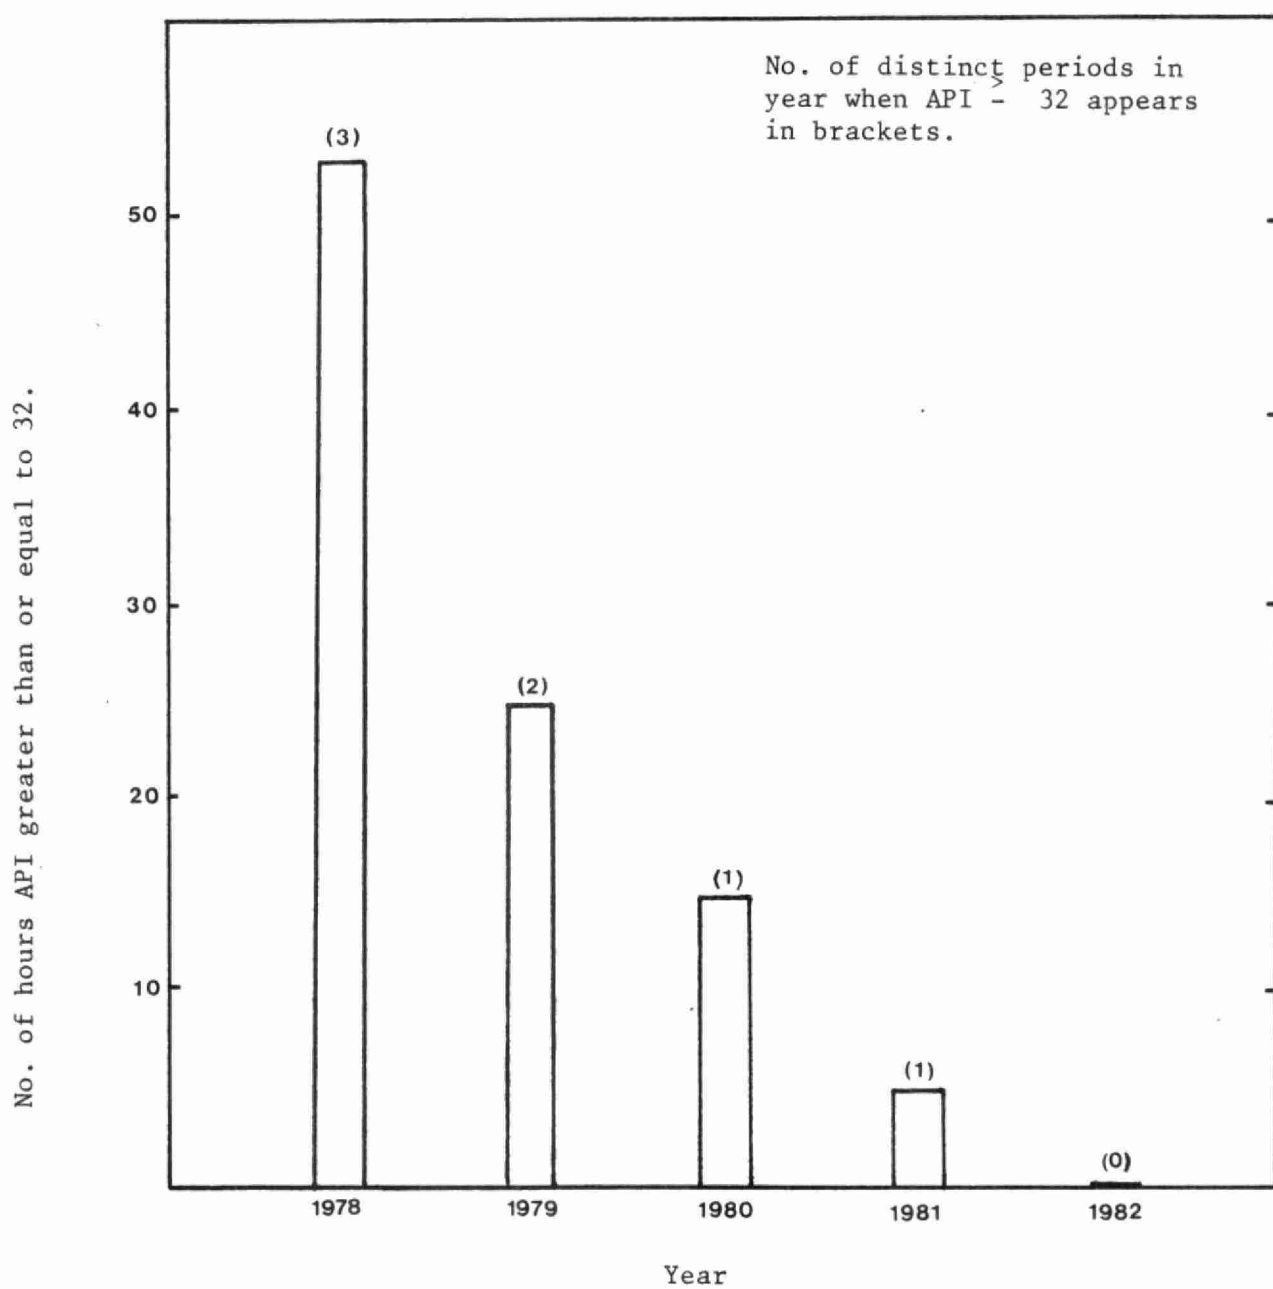

HYDROGEN SULPHIDE AND MERCAPTANS

Mercaptans are a group of organic compounds that contain sulphur and hydrogen and exhibit characteristics similar to hydrogen sulphide. Hydrogen sulphide is commonly referred to as "rotten egg gas" and many mercaptans are also malodorous at extremely low concentrations.

Both hydrogen sulphide and mercaptans originate in nature from anaerobic decomposition of organic matter containing sulphur. In the Sarnia area, the release of hydrogen sulphide and mercaptans into the atmosphere may result from the processing of petroleum feedstocks containing sulphur.

The criterion established to represent desirable ambient air quality with respect to hydrogen sulphide is 0.02 ppm as an average for 1 hour. This criterion is based on the offensive odours exhibited by this gas. Similarly, the criterion for mercaptans is based on odour and was established as 0.01 ppm averaged for 1 hour and expressed as methyl mercaptan.

Unfortunately, the monitoring instrument in Sarnia does not segregate hydrogen sulphide from mercaptans but determines their combined concentrations and reports these concentrations as hydrogen sulphide. However, the monitoring instrument over-responds to some mercaptans such that the concentration would be reported as more than an equivalent amount of hydrogen sulphide. In consideration of these shortcomings the combined concentrations of hydrogen sulphide and mercaptans are compared to the less restrictive hydrogen sulphide criterion.

During 1982 the hourly criterion of 0.02 ppm was not exceeded at station 14062, located in east Sarnia. A pollution rose, Figure 7, constructed with the use of wind speed and direction data from station 14062 indicates higher average levels of hydrogen sulphide and mercaptans when winds are blowing southwest from the industrialized area. Complaints about hydrogen sulphide and mercaptan-like odours are received infrequently by the Sarnia Office of the Ministry. Most of the complaints received pertain to sources outside Sarnia or may be related to upsets at a local industry.

The summary in Table A5, Appendix 4 shows that the data have been very comparable in recent years with very infrequent excursions of the 1-hour criterion and no excursions in 1982.

CARBON MONOXIDE

Combustion processes represent man's major emissions of carbon monoxide. Emissions from motor vehicles are most significant because they occur near ground level and are concentrated in urban areas where the public may be exposed for lengthy periods. Industries and power-generating plants normally provide adequate dispersion for their emissions to prevent unsatisfactory levels of carbon monoxide in the ambient air.

The criteria for carbon monoxide, which are based on the protection of human health, are 30 ppm averaged for 1 hour and 13 ppm averaged for any consecutive 8-hour period.

During 1982 carbon monoxide was monitored at stations 14064, located in the downtown core at Centennial Park. The criteria for desirable ambient air quality were

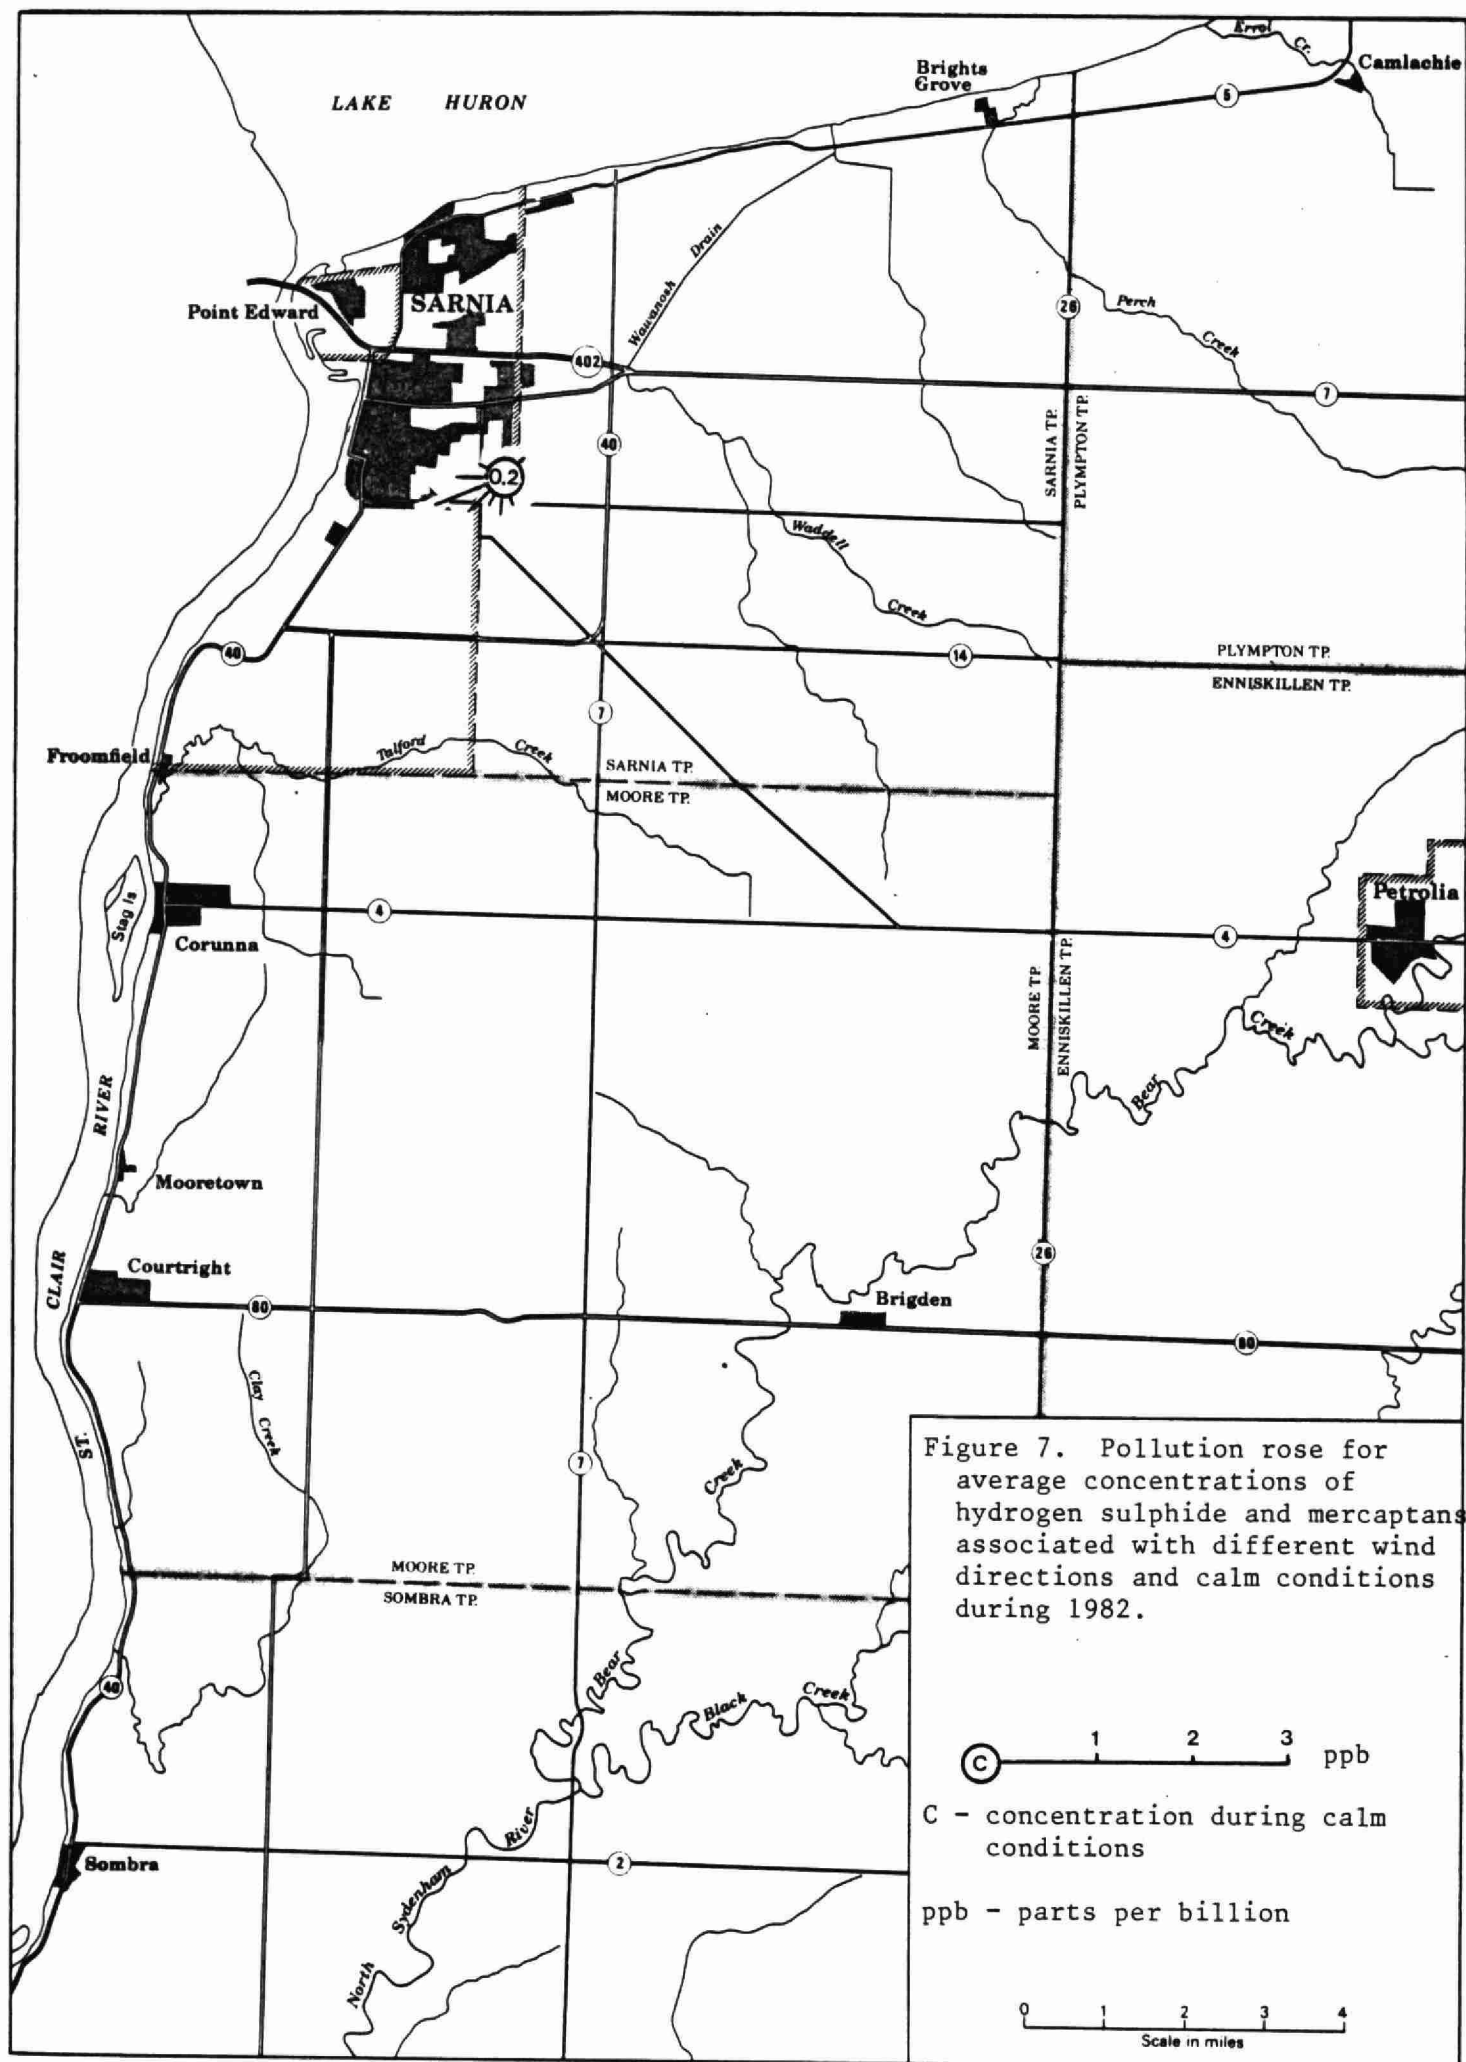


Figure 7. Pollution rose for average concentrations of hydrogen sulphide and mercaptans associated with different wind directions and calm conditions during 1982.

not exceeded. Prior to July, 1978 carbon monoxide was measured in downtown Sarnia at station 14049. A summary of data for carbon monoxide obtained since 1974 is presented in Table A5, Appendix 4, and illustrates long-term conformity below established criteria.

OXIDES OF NITROGEN

Gaseous oxides of nitrogen are emitted into the atmosphere by man through combustion processes. Nitric oxide and nitrogen dioxide are the gaseous compounds of primary interest.

Criteria for desirable ambient air quality exist for nitrogen dioxide, but not for nitric oxide or total oxides of nitrogen. The criteria, which are based on offensive odours and the protection of human health, are 0.20 ppm averaged for 1 hour and 0.10 ppm averaged for 24 hours. The 24-hour criterion has not been exceeded since monitoring began in 1972. The only excursion of the 1-hour criterion was recorded at station 14064 on October 26, 1982. No single source is known to account for the elevated reading. Meteorological conditions were such that dispersion was poor. Monitoring began at station 14049 in downtown Sarnia in 1972 and in July 1978 the monitoring instrument was relocated to station 14064 in Centennial Park.

A summary of data for oxides of nitrogen appears in Table A5, Appendix 4. Levels are in ranges typical of communities the size of Sarnia.

Oxides of nitrogen in combination with reactive hydrocarbons and certain meteorological conditions play an important role in the formation of unsatisfactory levels of photochemical oxidants. Also, oxides of nitrogen react to form acids which are part of acidic precipitation. Therefore, consideration is being given to further controls on emissions of oxides of nitrogen.

HYDROCARBONS

Emissions from motor vehicles are a primary man-made source of hydrocarbons in the ambient air. Other significant man-made sources are incomplete combustion of fuels by industries and power plants, and evaporation losses during the storage and transportation of hydrocarbons. Natural phenomena also produce many hydrocarbons of which methane is the most abundant.

Owing to the wide range of effects associated with different hydrocarbons at various concentrations, no criteria for desirable ambient air quality have been established for total hydrocarbons. Instead, control is achieved by setting criteria for desirable levels of specific hydrocarbons in ambient air and/or establishing standards which control the impact of emissions of specific hydrocarbons.

Values for total hydrocarbons have been measured at station 14064 in Centennial Park since July, 1978. Prior to then, monitoring was conducted at station 14049 in the downtown core. Average levels measured at station 14064 have been lower than those measured at station 14049. A summary of data for hydrocarbons appears in Table A5, Appendix 4.

During part of 1977 and again in 1978, the Ministry conducted short-term intensified monitoring in the Sarnia area using mobile vans. These surveys⁽¹⁾ measured

- (1) Report on Ambient Air Surveys in the Sarnia Area, April, May and June, 1977, October and November, 1978. ARB-TDA Report No. 03-81, Ministry of the Environment, March 1981.

specific hydrocarbons throughout the Sarnia area. In 1982 a survey for specific hydrocarbons was conducted in the Vidal St. - Churchill Road area of Sarnia using a mobile monitoring van. The survey concentrated on the hydrocarbons styrene and benzene and concluded that emissions were minor during the survey period. The results of this survey are available from the Sarnia District Office.

OXIDANTS

Oxidants in the ambient air are primarily a result of a series of photochemical reactions and inter-reactions involving oxides of nitrogen and non-methane hydrocarbons. The reactions are promoted by certain meteorological conditions such as warm temperatures and intensive sunshine, resulting in higher levels of oxidants in the spring and summer months.

Throughout 1982 the Ministry monitored oxidants in the form of ozone at station 14064 in the downtown core of Sarnia, and at station 14118, situated in a rural setting approximately 10 kilometres east of Sarnia. Ozone normally accounts for 80 to 95 percent of the oxidants present in ambient air. Consequently, with technology for monitoring ozone being more accurate and efficient than for total oxidants, most regulatory agencies monitor for ozone.

Long-range transport of ozone and its precursor chemicals (oxides of nitrogen and hydrocarbons) may account for a very significant portion of local levels of ozone. Long-range transport from distances greater than 200 kilometres has been reported in the literature. Therefore, successful control of oxidants will depend on control strategies implemented in the United States as well as in

Ontario. The United States and Canada have been jointly addressing the significance of long-range transport of ozone and its precursor chemicals. In 1981 this Ministry participated in a study of the impact of emissions from the Detroit area on downwind ozone levels. This study resulted in a proposal by the State of Michigan to the U.S. Environmental Protection Agency for the control of oxidants in areas downwind of Detroit through the reduction of non-methane hydrocarbons in the Detroit area. This control plan is to allow the U.S. primary air quality standard for ozone (0.12 ppm averaged for 1 hour) to be attained by December 31, 1987. Ontario has launched a detailed study into oxidants and oxidant control strategies.

In addition to ozone formed by photochemical reactions in the troposphere, ground level concentrations of ozone are occasionally increased by ozone from the stratosphere being transported downward. Ozone is naturally produced in minor amounts by lightning.

Ontario's criterion for desirable ambient air quality established for ozone is 80 parts per billion (ppb) averaged for 1 hour. This criterion was established for the protection of vegetation, property and human health. Some oxidant-related effects that are detrimental to health are eye irritation and a decrease in performance during athletic endeavors.


During 1982 the criterion was exceeded 56 times at station 14064 and 10 times at station 14118. At both monitoring stations, the frequency of excursions was less than in previous years. The decrease was especially apparent at station 14118. Meteorological conditions during the spring and summer of 1982 were not as favourable for oxidant formation due to cooler temperatures. A summary of data for ozone appears in Table A6 of Appendix 4.

Pollution roses for 1982 are presented in Figure 8 to show the frequency of the total number of excursions above the criterion associated with different wind directions. The greatest frequency of excursions are associated with southerly and south-southwesterly winds. These winds are apt to be associated with the backs of high pressure systems or the area south of low pressure fronts which have weather favourable for photochemical reactions (clear sunny skies and warmer temperatures) and which promote long-range transport of oxidants and their precursor chemicals from the United States.

FLUORIDES

In the Sarnia area fluoride is emitted into the atmosphere from fossil-fueled power plants where it exists as an impurity in coal, from a fertilizer plant where it occurs as a constituent of phosphorus rock, and from petroleum refineries where it is used as a catalyst in alkylation.

Fluoridation rate is a measurement designed to indicate relative amounts of gaseous fluoride present over an extended period of time. A lime-impregnated filter is exposed to ambient air for thirty days and subsequently analyzed for fluoride content. This technique is inexpensive compared to other methods for measuring airborne fluorides. Some fluorides in particulate form are collected on the filters.

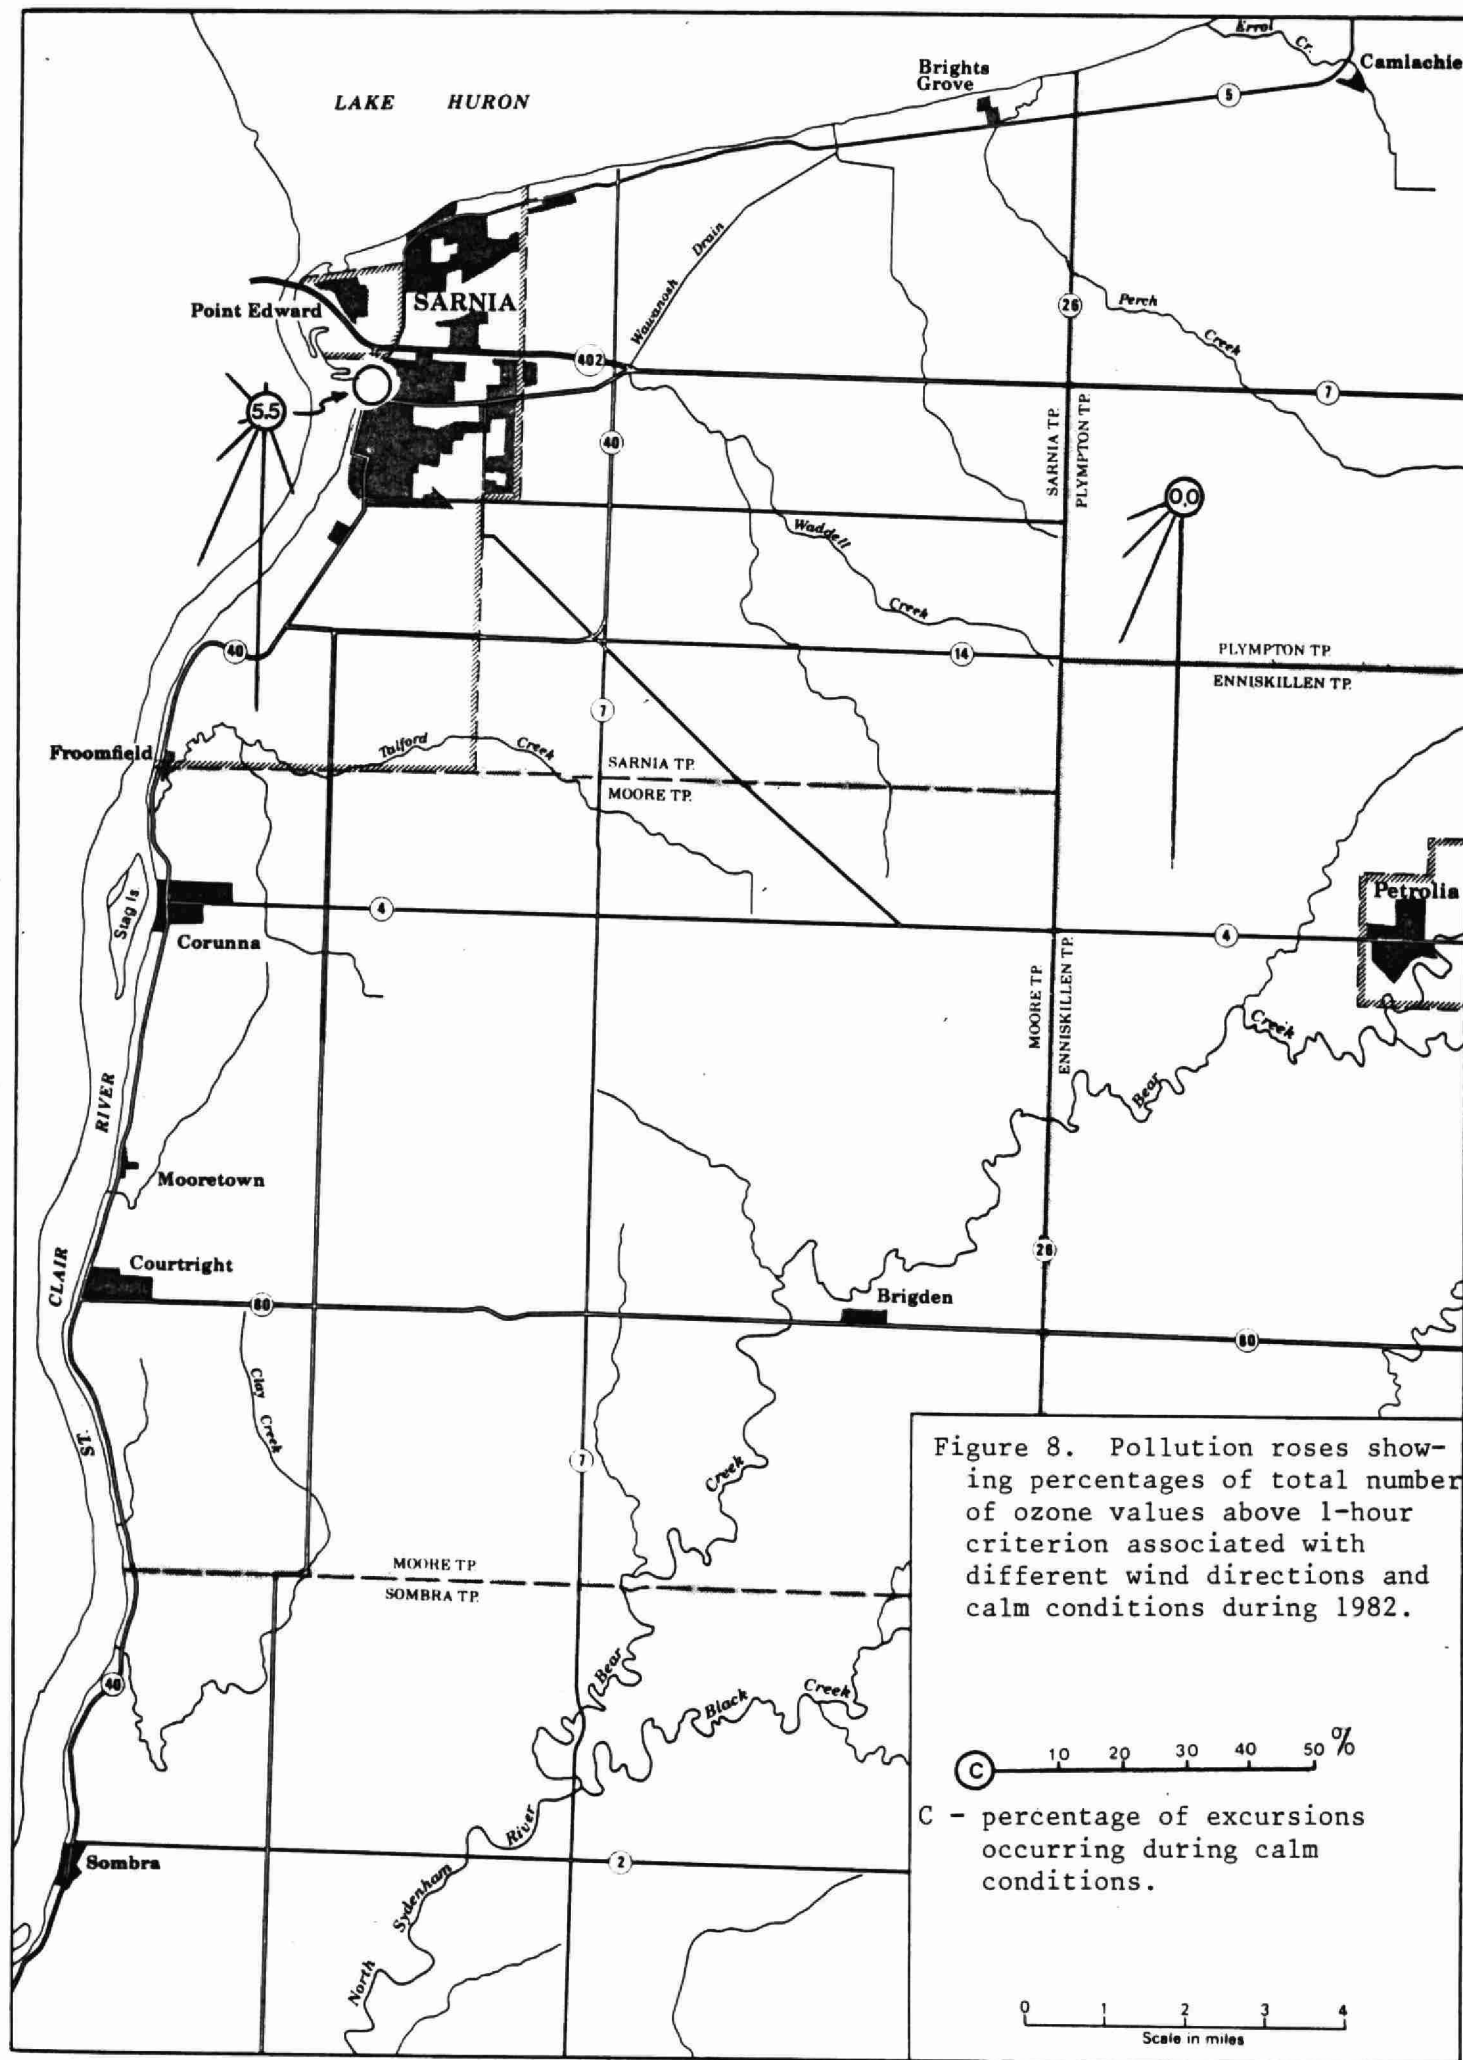

Criteria for desirable ambient air quality established for fluoridation rate are based on protection of vegetation. A criterion of 40 micrograms of fluoride per 100 square centimetres of filter per 30 days ($\text{ugF}/100 \text{ cm}^2/30 \text{ days}$) exists for the growing season of April 15 to October 15. A less stringent criterion of 80 $\text{ugF}/100 \text{ cm}^2/30 \text{ days}$ exists for the period of October 16 to April 14. Since the months of April and October are common to both criteria and fluoridation rate is determined on a monthly basis, excursions above the criteria during these months are determined by comparing fluoridation rate to the average of the two criteria ($60 \text{ ugF}/100\text{cm}^2/30 \text{ days}$).

The Ministry monitors fluoridation rate at station 14004, located south of Courtright in the vicinity of the fertilizer complex of Canadian Industries Limited and power plants of Ontario Hydro and Detroit Edison. Canadian Industries Limited has maintained a detailed monitoring network for fluoridation rate for many years and also operates a continuous gaseous fluoride analyzer.

The fluoridation rate values determined for the growing season of 1982 were lower than the values reported for the growing seasons 1978 to 1981. During 1982 the criterion for the growing season was met on 2 occasions while all the measurements for the growing seasons of 1978 to 1981 exceeded this criterion. As in previous years, the 1982 phytotoxicology survey conducted by the Ministry did not reveal vegetation damage attributable to fluoride off company property. Table 4 presents the data for fluoridation rate from 1976 to 1982.

Table 4. Fluoridation rates measured at station 14004 from 1976 to 1982 (ug F/100 cm²/30 days)

Year	Jan	Feb	March	April	May	June	July	Aug	Sept	Oct	Nov	Dec	Annual Average
1976						<u>46</u>	38	<u>74</u>	<u>48</u>	39	21	40	44
1977	42	23	53	32	<u>78</u>	31		<u>79</u>	<u>112</u>	29	<u>104</u>	50	58
1978	<u>83</u>	51	53	57	<u>100</u>	<u>65</u>	<u>94</u>	<u>74</u>	<u>74</u>	57	53	59	68
1979	32	63	25	56	<u>54</u>	<u>64</u>	<u>68</u>	<u>129</u>	<u>89</u>	49	32	26	57
1980	16	23	51	<u>62</u>	<u>61</u>	<u>49</u>	<u>83</u>	<u>84</u>		36	28	31	48
1981	48	48	30	49	<u>69</u>	<u>78</u>	<u>116</u>	<u>122</u>	<u>95</u>	<u>71</u>	55	24	67
1982	48	67	35	35	<u>99</u>	20	<u>50</u>		38	<u>86</u>	35	20	48

NOTE: Underlined values exceeded criteria for desirable ambient air.

APPENDIX I
MONITORING NETWORK

Table A1. Locations of monitoring stations and parameters being monitored.

Station No.	Location	Parameters measured	Height of measurements	Purpose of stations and comments
14001	Sarnia General Hospital	Suspended particulates	16 m.	Historical station which has been in operation since 1962. Does not reflect ground level concentrations but does indicate more direct effects of particulates from high stacks and long-range transport.
14004	5½ miles south of Courtright	Continuous SO ₂ fluoridation rate	4 m.	Monitors SO ₂ from power generating stations and fluorides from fertilizer industry.
14016	1¼ miles south of Courtright	Suspended particulates continuous SO ₂ , WS, WD, Temp., WS, WD, Temp., WS, WD, Temp., telemetering equipment	1 m. 10 m. 30 m. 92 m.	Monitors suspended particulates and sulphur dioxide in relation to power generating plants. Provides meteorological data required for stability forecasts and air quality interpretations.
14030	R. R. #1 Corunna	Suspended particulates	3 m.	Monitors particulates in the vicinity of Tricil Limited.
14031	R. R. #1 Mooretown	Suspended particulates	3 m.	Monitors particulates in the vicinity of Tricil Limited.
14049	Victoria Street	Continuous SO ₂ , CO, NO, NO ₂ , NO _x , O ₃ , total hydrocarbons, and suspended particulates	4 m.	Monitored air pollutants in a heavily populated area where the pollutants from traffic, commercial establishments and the heavily industrialized complex south of the monitoring station should be high relative to residential areas. This site was terminated in 1978 and the instruments moved to station 14064.

Table A1. continued

Station No.	Location	Parameters measured	Height of measurements	Purpose of stations and comments
14054	Sarnia Yacht Club	Suspended particulates	5 m.	Monitors suspended particulates in the north Sarnia-Point Edward area.
14059	Riverbend, Corunna	Suspended particulates	4 m.	Monitors suspended particulates in the residential area of Corunna which is surrounded by industry and generating stations.
14062	Eastland Plaza, 242A Indian Rd. S.,	Continuous SO ₂ , H ₂ S & mercaptans WS, WD	6 m. 10 m.	Monitors SO ₂ , H ₂ S and mercaptans in residential-commercial area ² of east Sarnia which is adjacent to refinery operations. Provides meteorological data useful in identifying sources of pollutants.
14064	Centennial Park Front Street, Sarnia	Continuous SO ₂ , CO, NO, NO ₂ , NO _x , O ₃ , total hydrocarbons, 1-hr COH, suspended particulates, tele- metering equipment	3 m.	Monitors main air pollutants in an area adjacent to downtown Sarnia and in line with many point sources of pollution located to the south of the downtown area. Provides Air Pollution Index for Sarnia.
14118	Petrolia Public Utilities Comm- ission Pumping Station, 4 miles west of Wyoming.	O ₃	5 m.	Monitors ozone levels in a rural location
14151	Front and David Streets, downtown Sarnia	Suspended particulates dustfall	3 m.	Monitors pollutants in commercial area which is also affected by heavily industrialized area to south. Since this is the location of a monitoring station operated by the Lambton Industrial Society, cross checking of monitoring techniques is possible.

Table A2. Desirable ambient air quality criteria established for Ontario

Parameter	Desirable ambient air quality criteria	Prime reasons for establishing criteria or monitoring parameter
Carbon monoxide	30 ppm averaged for 1 hour	Protection of human health
	13 ppm averaged for 8 hours	Protection of human health
Dustfall	7.0 g/metre ² in 30 days	Historical and in keeping with other control agencies
	4.6 g/metre ² (mean monthly average in 1 year)	
Fluoridation rate	40 ug F/100 cm ² of limed filter paper in 30 days during April 15 to October 15.	Protection of vegetation
	80 ug F/100 cm ² of limed filter paper in 30 days during October 16 to April 14.	Protection of vegetation (less restrictive criterion during the non growing season)
Hydrocarbons (total, methane & non-methane)	NONE	Effects of hydrocarbons vary widely depending on their chemical-physical nature. Certain non-methane hydrocarbons may react photochemically to produce oxidants.
Hydrogen sulphide	0.02 ppm averaged for 1 hour	Protection against offensive odours.
Mercaptans	0.01 ppm averaged for 1 hour	Protection against offensive odours.
Nitric oxide	NONE	Reacts with oxygen to produce NO ₂ .
Nitrogen dioxide	0.20 ppm averaged for 1 hour	Protection of human health and protection against offensive odours.
	0.10 ppm averaged for 24 hours	Protection of human health and protection against offensive odours.

Table A2. continued

Parameter	Desirable ambient air quality criteria	Prime reasons for establishing criteria or monitoring parameter
Oxides of nitrogen	NONE	
Ozone	0.08 ppm averaged for 1 hour	Protection of vegetation, adverse health effects
Sulphur dioxide	0.25 ppm averaged for 1 hour	Protection of vegetation
	0.10 ppm averaged for 1 day (24 hours)	Protection of human health
	0.02 ppm averaged for 1 year	Protection of vegetation
Suspended particulates	120 ug/m ³ averaged for 24 hours	Based on health effects in conjunction with elevated levels of SO ₂ and impairment of visibility.
	A geometric mean of 60 ug/m ³ during 1 year	Based on public awareness of visible pollution
Cadmium in suspended particulates	2.0 ug/m ³ averaged for 24 hours	Protection of human health
Lead in suspended particulates	5 ug/m ³ averaged for 24 hours	Protection of human health
	A geometric mean of 2 ug/m ³ over a 30-day period	Protection of human health
Nickel in suspended particulates	2.0 ug/m ³ averaged for 24 hours	Protection of vegetation
Vanadium in suspended particulates	2.0 ug/m ³ averaged for 24 hours	Protection of human health

APPENDIX 2
METEOROLOGICAL DATA

Table A3. Percent frequencies of wind directions at the 30-metre level of station 14016.

Year	N	NE	E	SE	S	SW	W	NW
1982	12.1	9.5	5.2	8.9	22.4	16.4	12.6	12.9
1981	13.8	9.9	4.5	7.8	18.6	15.8	11.9	17.7
1980	12.6	8.6	5.6	7.5	20.1	15.1	14.4	16.1
1979	10.7	8.7	6.5	8.9	24.7	14.7	11.9	14.0
1978	13.6	12.7	6.3	6.0	19.0	17.2	11.9	13.3
1977	11.3	9.8	5.3	7.2	18.5	21.2	14.1	12.6
1976	12.2	9.2	3.5	4.7	18.1	20.5	15.1	16.7
1975	9.4	11.6	6.7	7.6	19.3	20.5	12.9	12.1
1974	12.2	10.6	5.2	5.7	20.6	21.6	12.1	12.1
1973	11.6	11.0	8.1	7.2	15.8	20.6	12.9	12.8
1972	15.8	12.0	6.5	8.3	17.4	16.4	11.7	12.0

APPENDIX 3
PARTICULATES

Table A4. Concentrations (ug/m³) of various constituents of suspended particulates: 1976 to 1982.

Station and Year	# of samples	Cadmium		# of samples	Chromium		# of samples	Copper		# of samples	Iron		# of samples	Lead	
		Avg.	Max.		Avg.	Max		Avg.	Max		Avg.	Max		Avg.	Max
14001															
1976	10	0.001	0.004	10	0.017	0.066	10	0.31	0.73	10	1.0	2.4	10	0.3	0.6
1977	18	0.000	0.003	18	0.009	0.030	18	0.68	2.48	18	1.2	5.8	18	0.3	1.3
1978	24	0.001	0.005	24	0.010	0.023	24	0.22	0.54	24	1.1	4.0	24	0.2	0.7
1979	32	0.001	0.003	32	0.003	0.013	32	0.23	0.62	32	0.8	3.0	32	0.2	0.4
1980	24	0.001	0.004	24	0.001	0.007	24	0.19	0.56	24	0.9	2.3	24	0.3	0.5
1981	54	0.001	0.003	54	0.003	0.014	54	0.12	0.29	54	0.7	2.6	54	0.2	0.4
1982	57	0.001	0.003	53	0.003	0.011	58	0.19	0.81	54	0.5	1.9	56	0.2	0.6
14016															
1976	18	0.000	0.003	18	0.003	0.011	18	0.41	1.17	18	0.6	1.6	18	0.2	0.4
1977	21	0.000	0.002	21	0.008	0.025	21	0.31	0.58	21	0.6	1.8	21	0.2	0.6
1978	26	0.001	0.003	26	0.007	0.019	26	0.50	1.38	26	0.9	3.2	26	0.1	0.4
1979	35	0.001	0.004	35	0.002	0.010	35	0.39	1.01	35	0.8	2.9	35	0.2	0.6
1980	25	0.001	0.004	25	0.002	0.009	25	0.44	0.96	25	0.6	1.8	25	0.1	0.4
1981	124	0.001	0.004	124	0.003	0.014	124	0.19	1.59	124	0.6	2.6	124	0.1	0.3
1982	338	0.001	0.004	328	0.002	0.116	339	0.28	1.71	308	0.4	3.1	328	0.1	0.4
14030															
1978	11	0.002	0.004	11	0.007	0.019	11	0.37	0.98	11	1.2	2.2	11	0.3	0.9
1979	50	0.001	0.004	50	0.007	0.022	50	0.32	1.36	55	0.6	2.2	54	0.1	0.4
1980	52	0.001	0.004	52	0.003	0.023	52	0.47	2.34	52	0.5	1.5	52	0.1	0.3
1981	58	0.001	0.009	58	0.005	0.053	58	0.17	0.56	58	0.7	4.5	58	0.1	1.4
1982	58	0.001	0.002	55	0.003	0.010	58	0.11	0.29	48	0.5	3.5	56	0.1	0.7
14031															
1978	12	0.002	0.003	12	0.004	0.008	12	0.44	1.00	12	0.7	1.3	12	0.1	0.3
1979	54	0.001	0.005	54	0.010	0.189	54	0.25	0.97	58	0.5	2.7	54	0.1	0.4
1980	54	0.001	0.004	54	0.005	0.030	54	0.13	0.26	54	0.5	2.2	54	0.1	0.3
1981	58	0.001	0.003	58	0.005	0.035	58	0.15	0.95	58	0.6	2.6	58	0.1	0.2
1982	54	0.000	0.002	56	0.004	0.010	58	0.13	0.29	50	0.5	3.7	56	0.1	0.6
14064															
1981	57	0.001	0.004	57	0.003	0.013	57	0.17	0.86	57	0.7	2.3	59	0.1	0.6
1982	52	0.001	0.008	47	0.002	0.009	52	0.21	1.66	53	0.7	2.9	50	0.2	1.1

Table A4. continued

Station and Year	Manganese			Nickel			Nitrate			Sulphate			Vanadium		
	# of samples	Avg.	Max.	# of samples	Avg.	Max	# of samples	Avg.	Max	# of samples	Avg.	Max	# of samples	Avg.	Max
14001															
1976	2	0.30	0.37	10	0.029	0.107	58	3.8	15.8	58	8.6	44.6	10	0.02	0.11
1977	18	0.04	0.23	18	0.014	0.064	47	4.7	24.5	48	12.9	43.9	18	0.01	0.07
1978	24	0.08	0.58	24	0.010	0.033	52	4.6	21.3	51	11.1	39.7	24	0.00	0.02
1979	32	0.06	0.38	32	0.010	0.076	54	4.8	16.0	54	11.0	35.7	32	0.01	0.07
1980	24	0.03	0.13	24	0.010	0.033	55	5.5	18.4	55	13.4	28.6	24	0.01	0.04
1981	54	0.03	0.10	54	0.008	0.064	58	4.8	19.1	58	11.1	25.6	54	0.01	0.14
1982	57	0.02	0.10	58	0.010	0.058	53	4.3	13.3	58	10.9	34.8	58	0.02	0.09
14016															
1976	8	0.01	0.04	18	0.013	0.031	96	4.0	20.0	105	8.7	33.4	18	0.00	0.02
1977	21	0.03	0.09	21	0.022	0.165	54	3.7	27.8	54	10.0	24.6	21	0.01	0.08
1978	26	0.02	0.06	26	0.016	0.194	53	4.6	24.6	53	11.2	35.3	26	0.00	0.10
1979	35	0.02	0.07	35	0.008	0.042	56	5.4	14.8	56	12.4	41.0	35	0.00	0.01
1980	25	0.02	0.10	25	0.010	0.064	56	4.8	11.4	56	11.5	25.1	25	0.01	0.10
1981	124	0.02	0.12	124	0.005	0.045	128	4.2	13.5	126	8.7	37.0	124	0.01	0.08
1982	339	0.01	0.10	339	0.006	0.100	339	3.5	23.3	339	9.3	48.7	338	0.01	0.14
14030															
1978				11	0.009	0.013									
1979	45	0.01	0.05	50	0.006	0.032							45	0.00	0.02
1980	50	0.01	0.08	52	0.004	0.026							50	0.00	0.01
1981	51	0.02	0.10	56	0.004	0.034	51	4.4	13.7	51	9.5	27.6	51	0.01	0.03
1982	57	0.01	0.07	58	0.003	0.009	55	3.8	9.0	55	9.0	39.7	58	0.01	0.02
14031															
1978				12	0.016	0.057									
1979	46	0.02	0.07	54	0.009	0.171							46	0.00	0.01
1980	52	0.02	0.11	54	0.005	0.021							47	0.01	0.02
1981	52	0.02	0.14	58	0.004	0.020	50	3.7	10.1	52	9.6	28.2	52	0.01	0.02
1982	57	0.01	0.05	55	0.003	0.013	56	3.5	11.3	56	8.6	31.3	58	0.00	0.02
14064															
1981	57	0.02	0.07	57	0.008	0.056	57	4.7	16.2	57	10.9	29.5	57	0.02	0.12
1982	52	0.03	0.21	53	0.009	0.067	51	4.3	15.6	51	10.3	32.6	52	0.01	0.11

Table A4. continued

Station and Year	# of samples	Nitrate			Sulphate				Lead		
		Avg.	Max		# of samples	Avg.	Max		# of samples	Avg.	Max
14054											
1976	54	3.7	13.2	61	8.9	34.8	3	0.2	0.3		
1977	49	3.8	20.2	49	10.1	25.7	15	0.2	0.5		
1978	49	4.8	20.4	49	11.5	37.0	57	0.2	1.3		
1979	55	5.1	14.3	55	12.5	39.2	55	0.2	1.1		
1980	57	5.2	14.8	57	12.4	27.6	53	0.2	1.0		
1981	57	4.3	14.1	57	10.2	30.0	57	0.1	0.3		
1982	58	3.8	11.1	58	10.3	41.5	55	0.2	0.8		
14051 (14151)											
1976	59	3.7	11.7	58	9.3	45.1					
1977	56	3.9	22.4	56	10.9	32.1					
1978	59	5.4	19.2	59	12.8	47.1					
1979	44	6.1	25.4	44	13.5	42.2					
1980	59	4.9	16.2	59	12.3	26.5					
1981	57	4.9	13.7	57	11.4	27.8					
1982	50	4.7	15.3	50	11.5	35.3					

APPENDIX 4

HYDROGEN SULPHIDE AND MERCAPTANS,
CARBON MONOXIDE, OXIDES OF NITROGEN,
HYDROCARBONS AND OZONE

Table A5. Summary of data for hydrogen sulphide and mercaptans, carbon monoxide, oxides of nitrogen and hydrocarbons.

Pollutant and Criteria	Station number	Year								
		1982	1981	1980	1979	1978	1977	1976	1975	1974
Hydrogen sulphide and mercaptans										
Annual average (ppm)	14062	0.000	0.000	0.000	0.001	0.001				
	14049					0.001	0.001	0.001	0.001	0.007
Percentage of values above 1-hr criterion ^(a)	14062	0.00	0.01	0.00	0.01	0.00				
	14049					0.15	0.01	0.04	0.38	9.78
Carbon Monoxide										
Annual average (ppm)	14064	0	0	0	0	0				
	14049					1	2	1	1	1
Percentage of values above: 1-hr criterion	14064	0	0	0	0	0				
	14049					0	0	0	0	0
8-hr criterion	14064	0	0	0	0	0				
	14049					0	0	0	0	0

Note: (a) Criterion for hydrogen sulphide

Table A5. continued

Pollutant and Criteria	Station number	Year								
		1982	1981	1980	1979	1978	1977	1976	1975	1974
Nitric oxide										
Annual average (ppm)	14064	0.01	0.01	0.01	0.02	0.02				
	14049					0.02	0.02	0.02		
Nitrogen dioxide										
Annual average (ppm)	14064	0.02	0.02	0.02	0.02	0.02				
	14049					0.03	0.03	0.03	0.02	
Percentage of values above: 1-hr criterion	14064	0.01	0	0	0	0				
	14049				0	0	0	0		
24-hr criterion	14064	0	0	0	0	0				
	14049				0	0	0	0		

Table A5. continued

Pollutant and Criteria	Station number	Year								
		1982	1981	1980	1979	1978	1977	1976	1975	1974
Total oxides of nitrogen										
Annual average (ppm)	14064	0.03	0.03	0.03	0.04	0.03				
	14049					0.05	0.05	0.05	0.05	
Total hydrocarbons										
Annual average (ppm)	14064	2.1	2.1	1.9	2.0	1.7				
	14049					2.6	2.4	2.3	2.6	2.8

Table A6. Summary of data for ozone

Station and Parameter	Year								
	1982	1981	1980	1979	1978	1977	1976	1975	1974
Station 14049									
Annual average (ppm)					0.023	0.020	0.019	0.024	0.018
Number of values above 1-hr criterion					51	87	56	132	80
Percentage of values above 1-hr criterion					1.1	1.0	0.7	1.9	1.1
Station 14064									
Annual average (ppm)	0.023	0.021	0.022	0.023	0.018				
Number of values above 1-hr criterion	56	67	68	130	56				
Percentage of values above 1-hr criterion	0.7	0.8	0.8	1.6	1.4				
Station 14118									
Annual average (ppm)	0.023	0.023	0.022	0.027	0.029	0.027			
Number of values above 1-hr criterion	10	85	39	138	249	182			
Percentage of values above 1-hr criterion	0.1	1.0	0.5	1.7	3.5	2.6			

ONTARIO _____



96936000008015

TERMINAL STREAM: SEVERN R.

[illegible]

- CAT. No. 23-115

PRINTED IN U. S. A.